




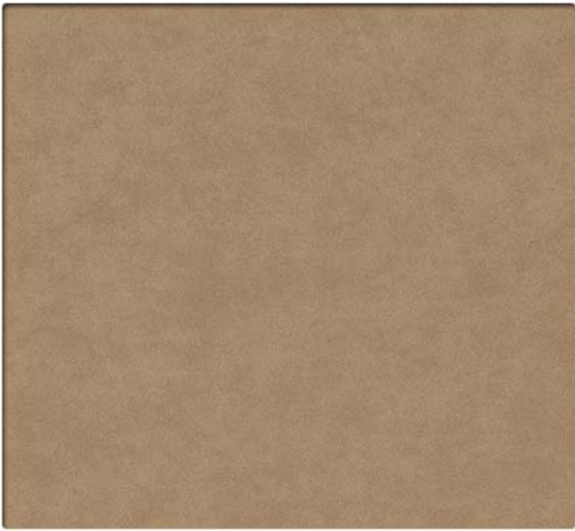


AC-65650 Sand #1

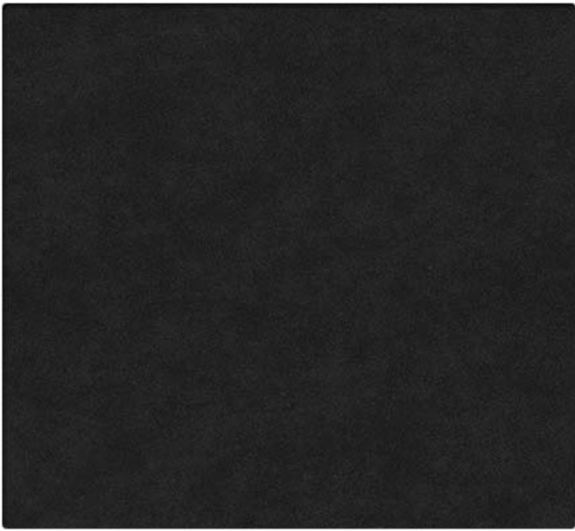


AC-65676 Onyx #27

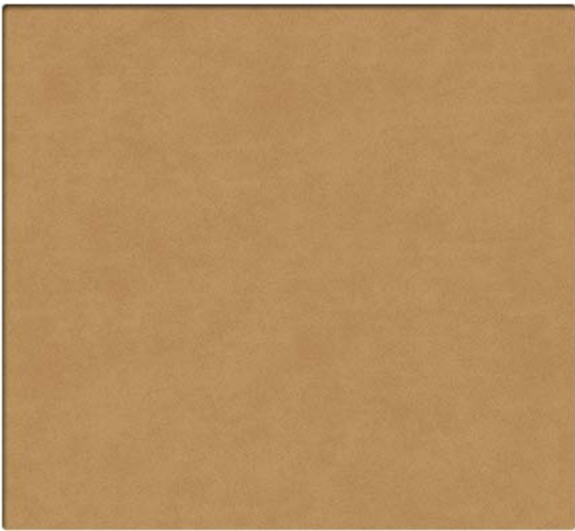

AC-65652 Wheat #3

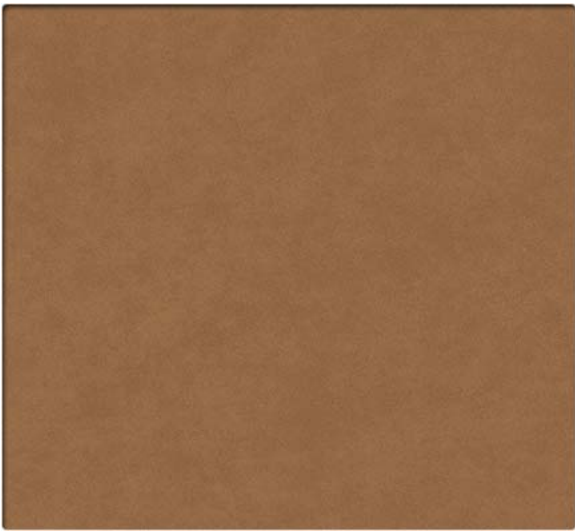


AC-65653 Cocoa #4

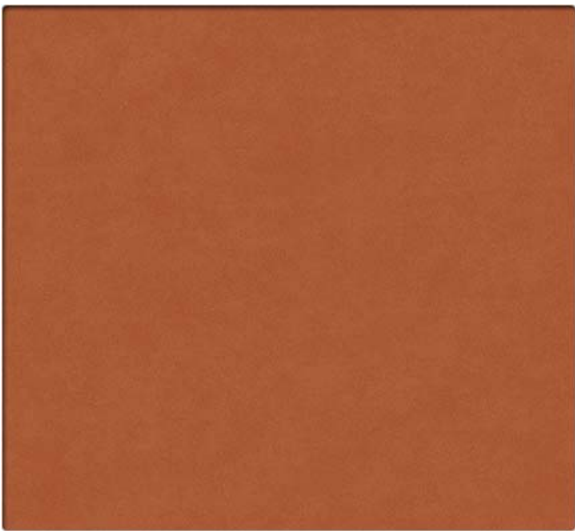


AC-65654 Coral #5




AC-65655 Russet #6

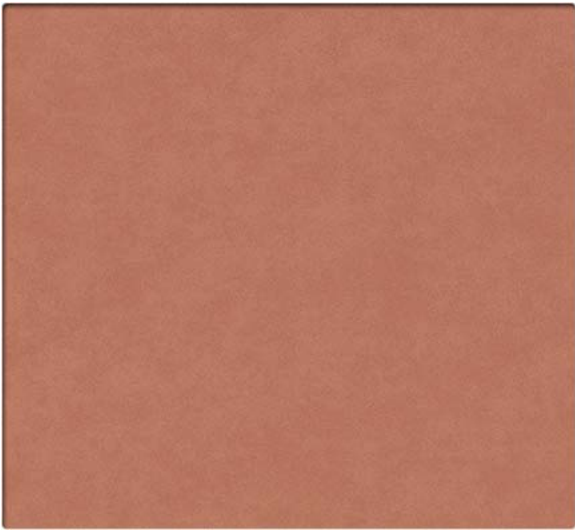


AC-65656 Blossom #7

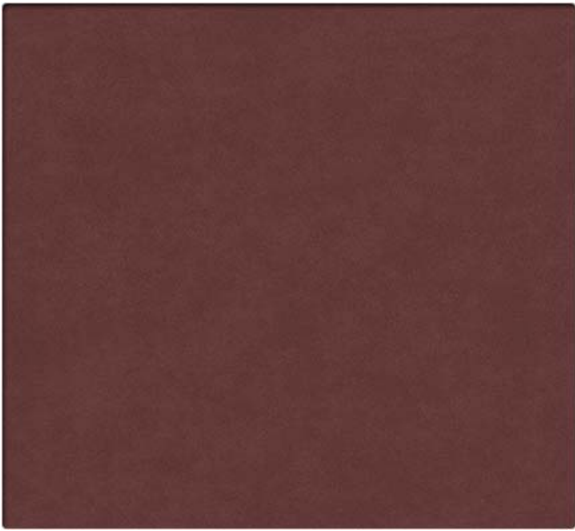


AC-65657 Bordeaux #8

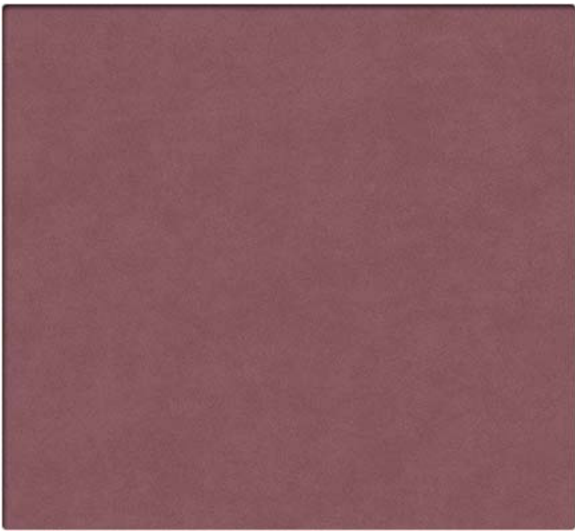

AC-65658 Lilac #9

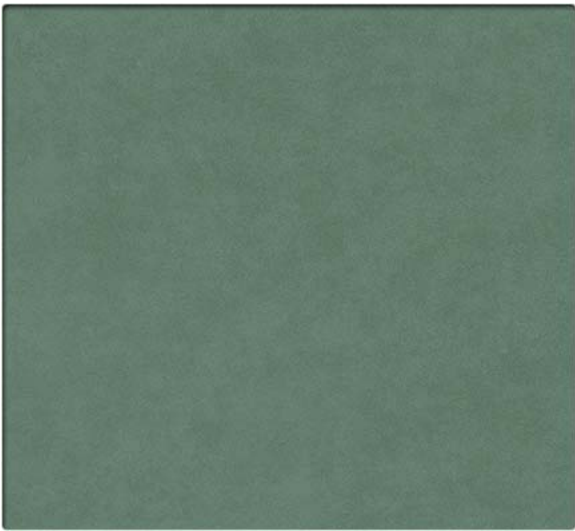


AC-65659 Sea Glass #10

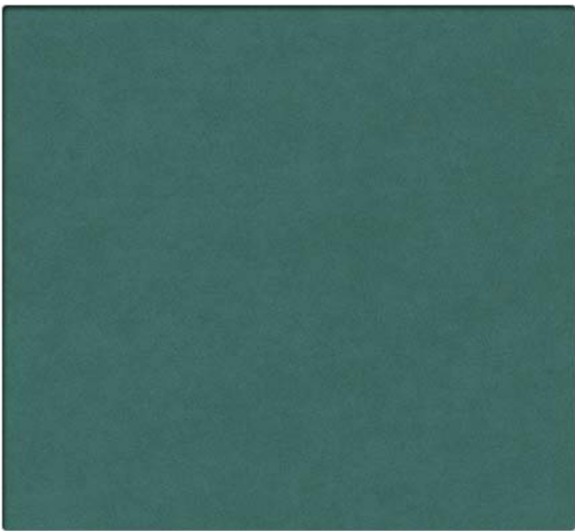


AC-65660 Caribbean #11




AC-65661 Mallard #12

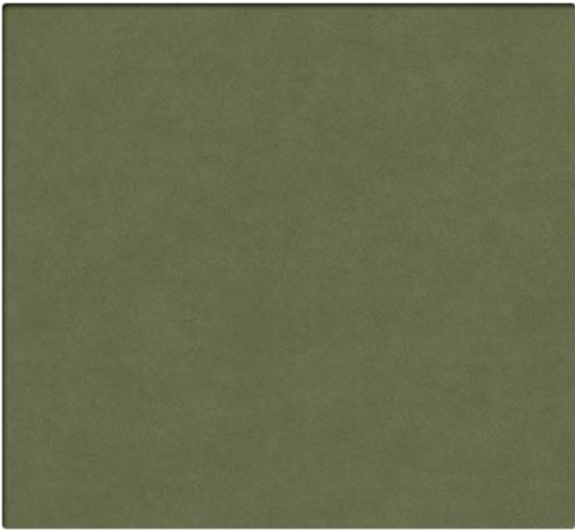


AC-65662 Basil #13

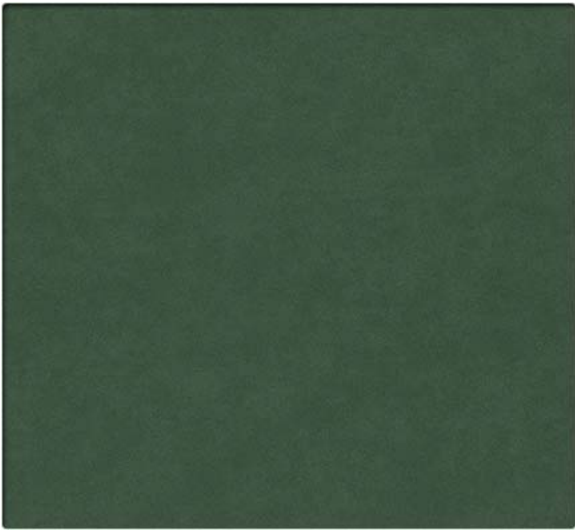

AC-65663 Eucalyptus #14

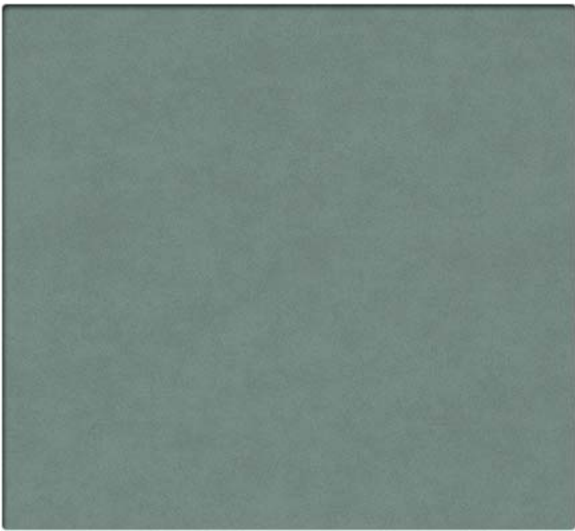

AC-65664 Ice Blue #15

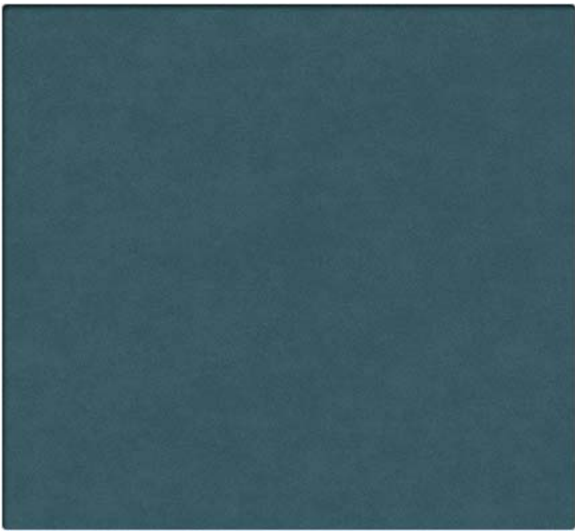

AC-65665 Baltic #16




AC-65666 Indigo #17




AC-65667 Bark #18



AC-65668 Mink #19

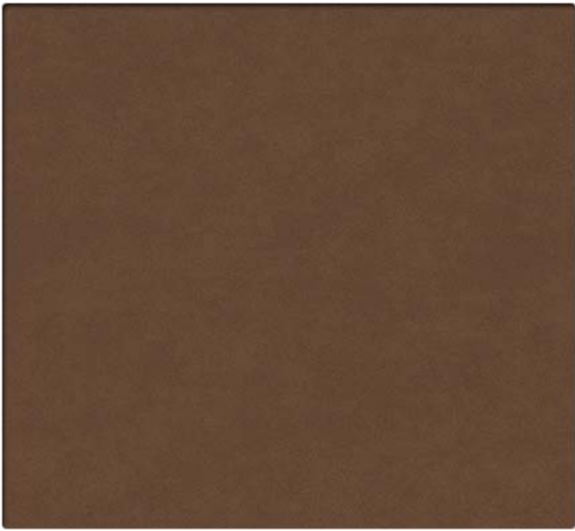

AC-65669 Chocolate #20

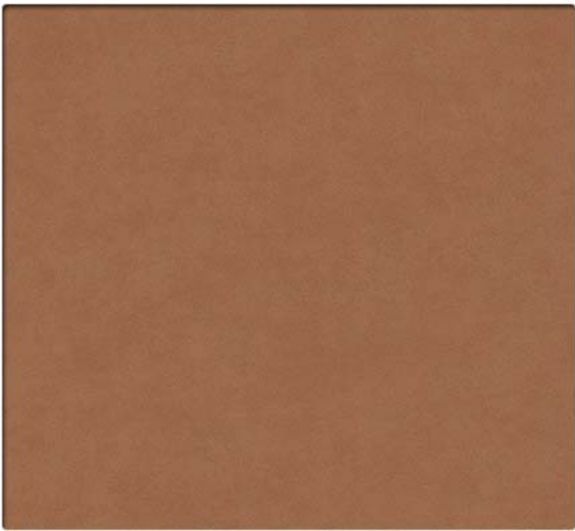

AC-65670 Adobe #21




AC-65671 Pebble #22



AC-65672 Cement #23



AC-65673 Mist #24

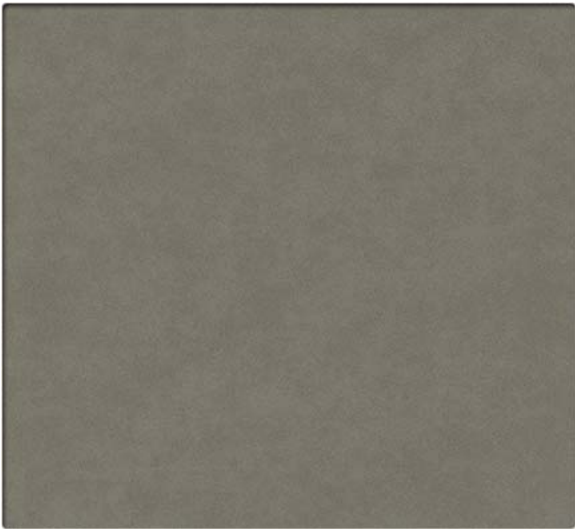

AC-65674 Stone #25



AC-65675 Smoke #26



AC-65651 Butterscotch #2

Performance Summary

- Enhanced abrasion resistance
- Denim stain resistant
- Fluid barrier
- Bleach-solution cleanable
- Enhanced fade resistance

Environmental

- GREENGUARD Gold Certified
- REACH Compliant
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications

Content	Non-Phthalate Vinyl Surface with a Polyester Fabric Backing
Backing	Polyester Fabric
Weight	31.7 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	30 yards

Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 250,000 double rubs - heavy duty
Adhesion ASTM D-751	Warp: 6.8 lbs. min., Fill: 5.4 lbs. min.
Break Strength CFFA-17	Warp: 146 lbs. min., Fill: 146 lbs. min.
Tear Strength CFFA-16	Warp: 11.5 lbs. min., Fill: 17 lbs. min.
Seam Slippage CFFA-14	Warp: 59.6 lbs. min., Fill: 69.1 lbs. min.
Colorfastness to Light AATCC-16	300 Hours, Class 4.5
Crocking AATCC-8	Dry: Class 5.0, Wet: Class 5.0
Fluid Barrier	Inherent Fluid Barrier

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
MVSS 302	Passed
NFPA 260	Class 1
UFAC	Class 1

