






AC-65570 Moonstone

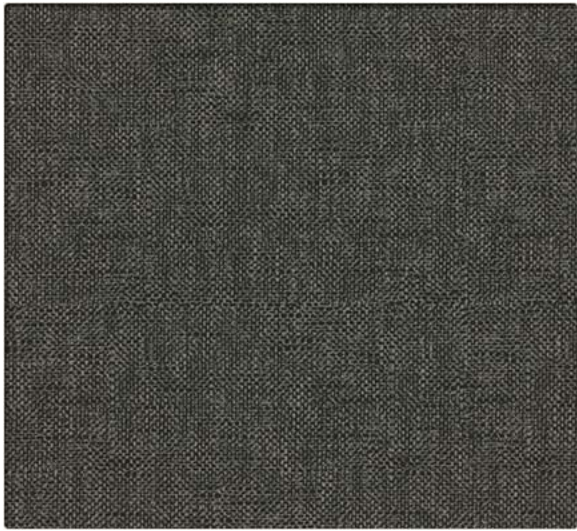


AC-65588 Onyx

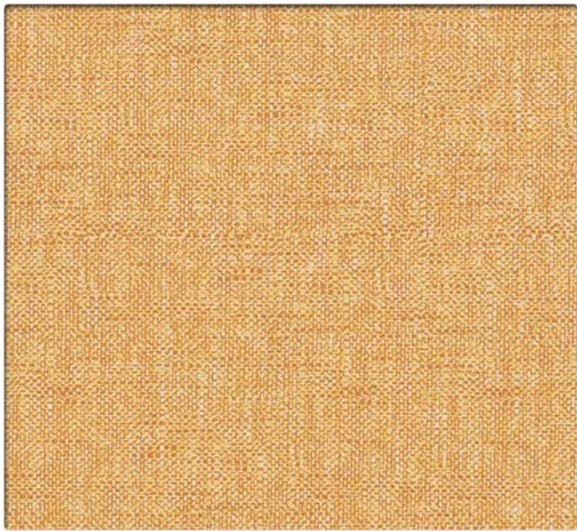


AC-65572 Amber

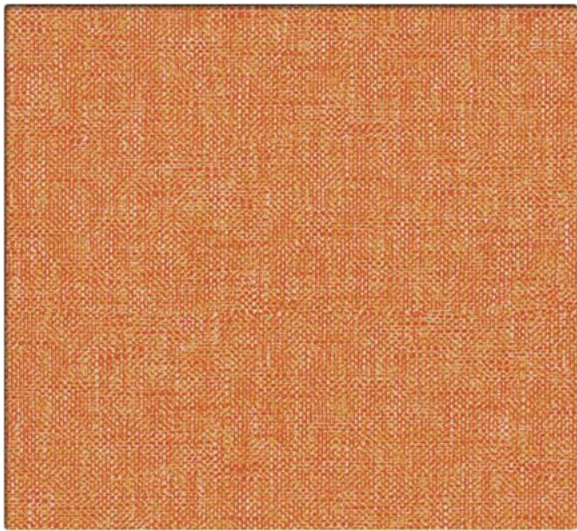


AC-65573 Papaya

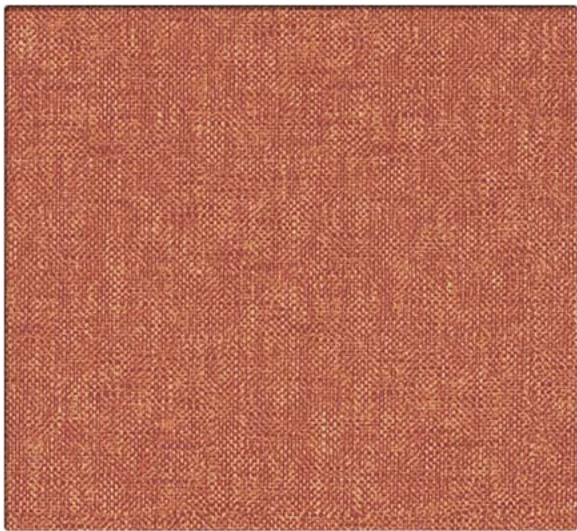


AC-65574 Chili

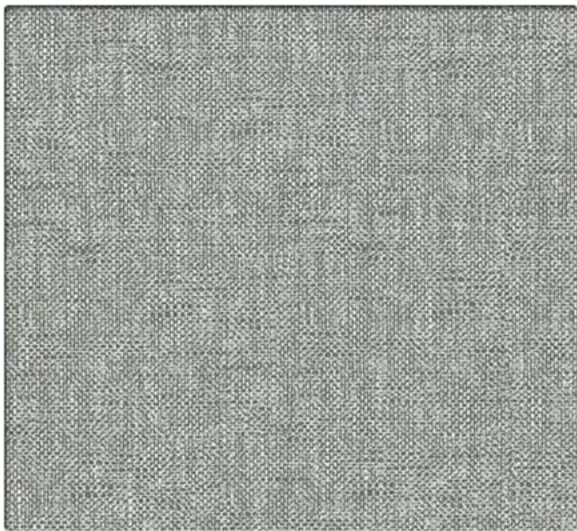


AC-65575 Ash

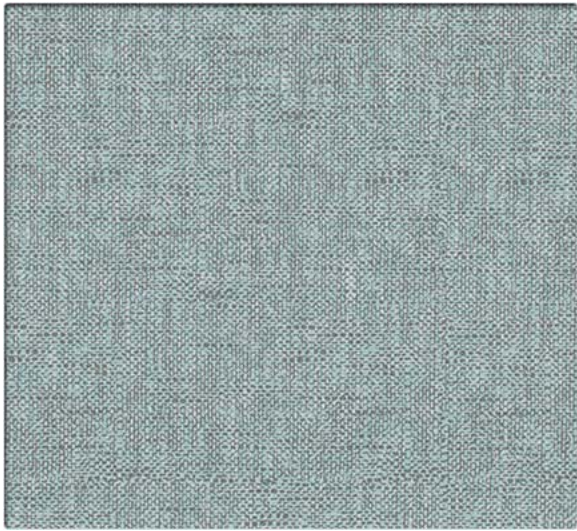


AC-65576 Storm

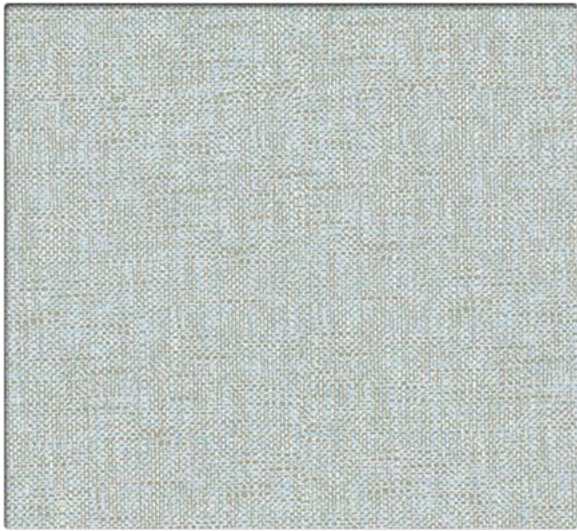


AC-65577 Ice Blue

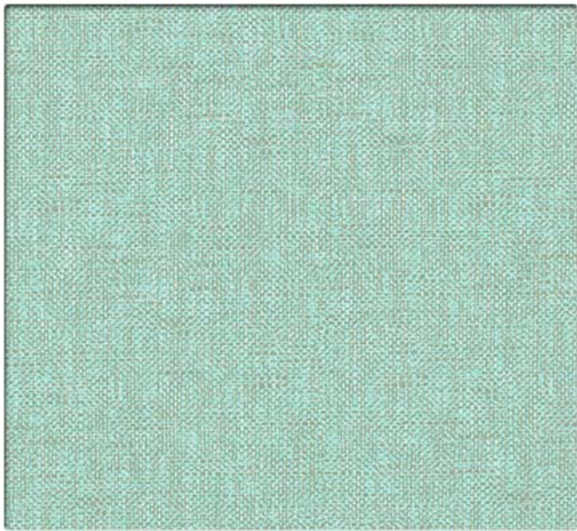


AC-65578 Seafoam

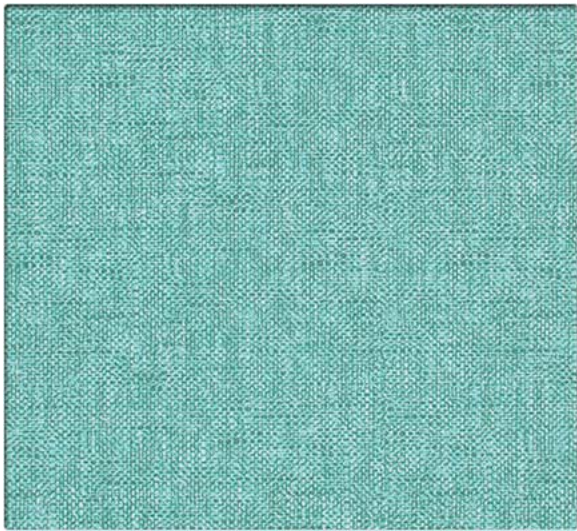


AC-65579 Sea Breeze

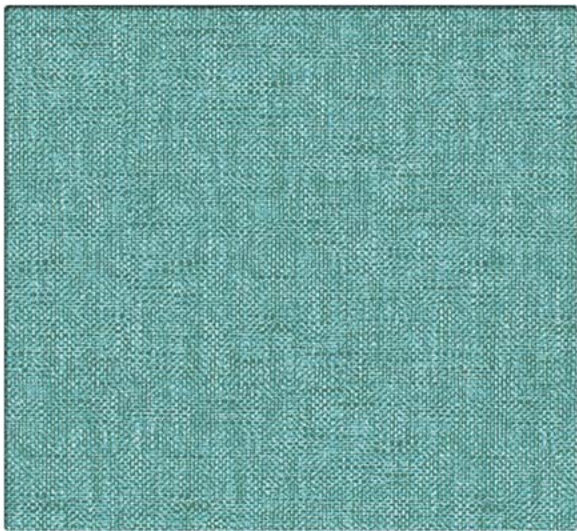

AC-65580 Caribbean

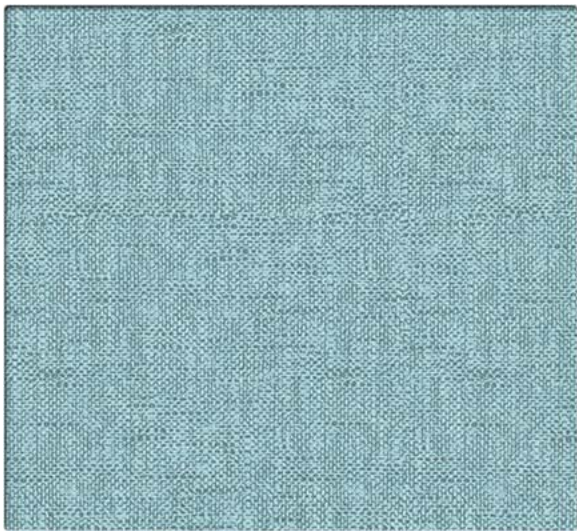


AC-65581 Sky

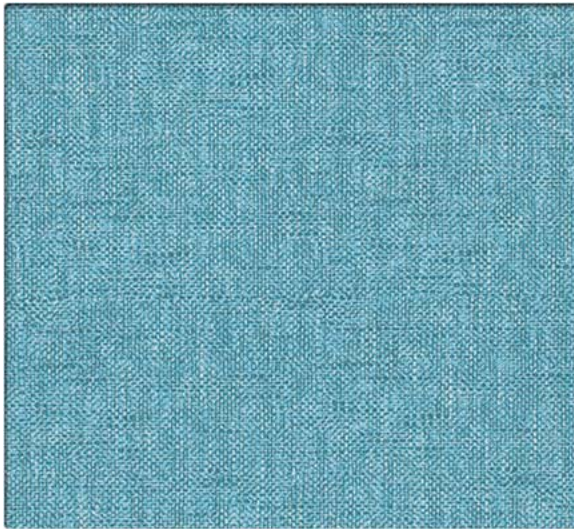


AC-65582 Aquamarine




AC-65583 Blue Razz

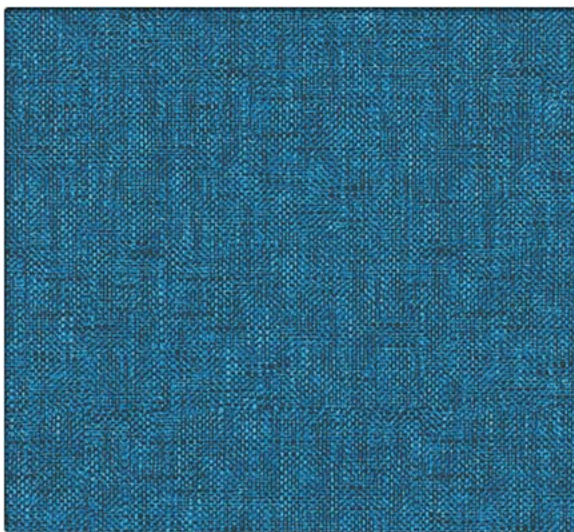


AC-65584 Baltic

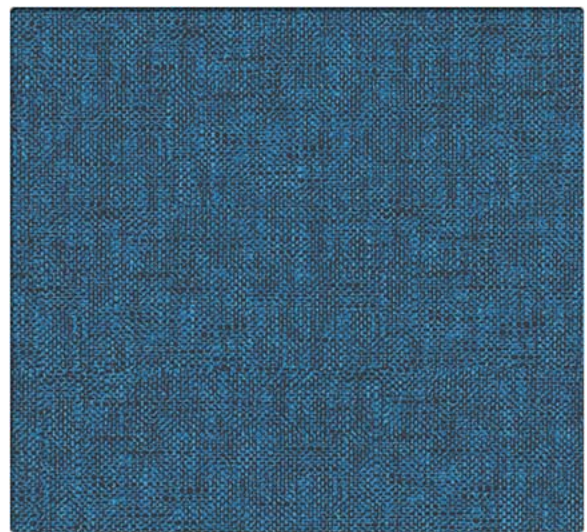


AC-65585 Sapphire

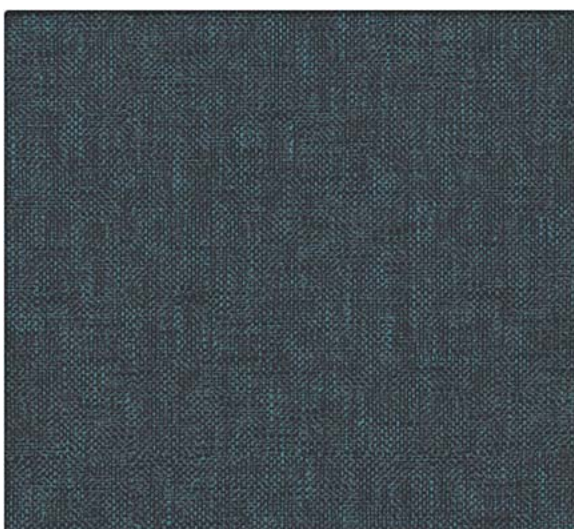

AC-65586 Indigo

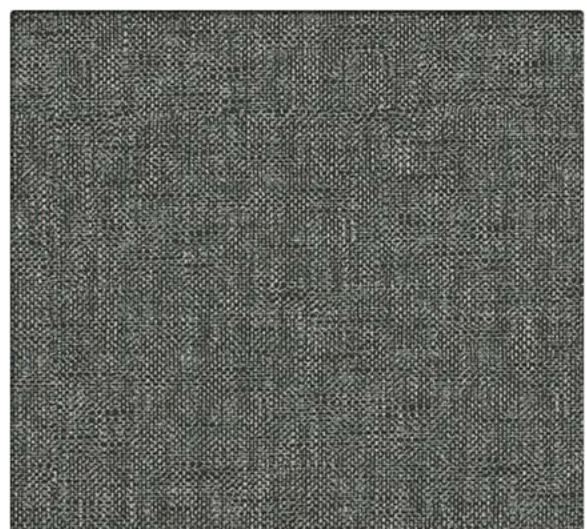

AC-65587 Graphite

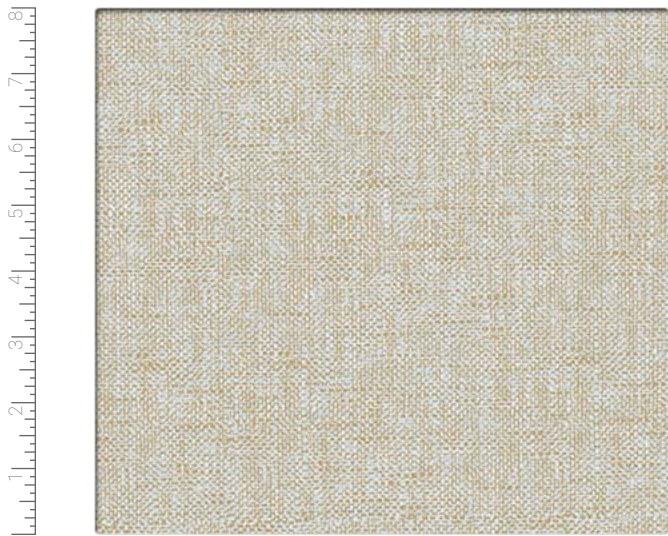

AC-65571 Mist

Performance Summary
- Enhanced soil + stain resistance - Enhanced abrasion resistance - Enhanced ink resistance - Denim stain resistant - Fluid barrier - Bleach-solution cleanable - Enhanced fade resistance

Environmental
- LBC Red List Free - REACH Compliant - RoHS Compliant - CA Section 01350 Compliant - Recycled content - No PFAS, fluorocarbons or perfluorinated compounds - No added flame retardants - No added antimicrobials - Formulated without Phthalates

Cleaning and Maintenance
Cleaning Code: (W-S) For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service. Bleach solutions of up to 10% may be used for more difficult stains. Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications	    
Content	94% Bio-Attributed Polycarbonate Polyurethane, 6% Silicone (14% total bio-based content - ASTM D6866 verified)
Finish	Advanced Soil and Stain Resistant Top Coat + ink resistance
Backing	100% Global Recycled Standard Certified Polyester
Weight	22.5 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	30 yards
Performance Characteristics	
Abrasion Resistance** ASTM D-4157	Exceeds 500,000 double rubs - heavy duty
Adhesion ASTM D-751	Warp: 4.0 lbs. min., Fill: 4.0 lbs. min.
Break Strength ASTM D-5034	Warp: 80.0 lbs. min., Fill: 120.0 lbs. min.
Tear Strength ASTM D-751-06	Warp: 45.0 lbs. min., Fill: 50.0 lbs. min.
Seam Slippage ASTM D-751-06	Warp: 45.0 lbs. min., Fill: 110.0 lbs. min.
Colorfastness to Light ASTM D-4329-99	200 Hours, Class 4.5
Crocking AATCC-8	Dry: Class 4.5, Wet: Class 4.5
Fluid Barrier	Inherent Fluid Barrier
Hydrolytic Stability ISO 1419 (Tropical Test Method C)	Passes a minimum of 24 weeks; making it suitable for high traffic commercial environments.
Flammability*	
California Technical Bulletin 117-2013 Section 1	Passed
MVSS 302	Passed
NFPA 260	Class 1
UFAC	Class 1