




AC-65520 Berry #1



AC-65540 Onyx #21

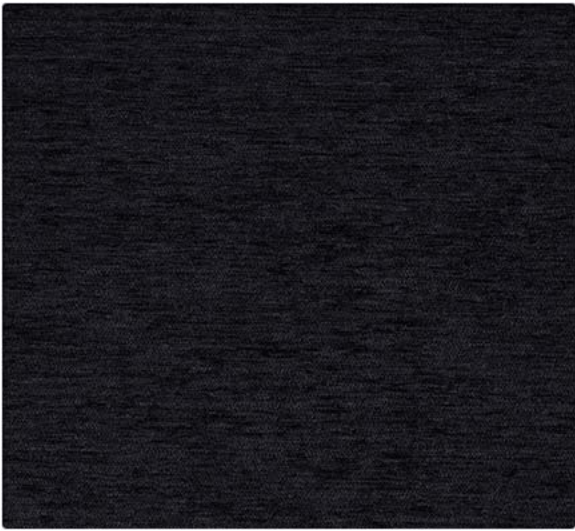

AC-65522 Adobe #3



AC-65523 Lilac #4



AC-65524 Pebble #5




AC-65525 Beach #6



AC-65526 Hemp #7



AC-65527 Wheat #8

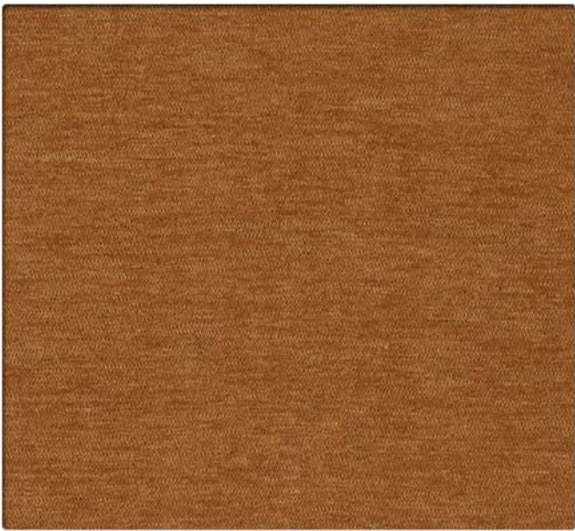

AC-65528 Amber #9



AC-65529 Olive #10



AC-65530 Avocado #11



AC-65531 Forest #12



AC-65532 Herb #13



AC-65533 Ocean #14



AC-65534 Federal #15




AC-65535 Midnight #16



AC-65536 Indigo #17



AC-65537 Chocolate #18

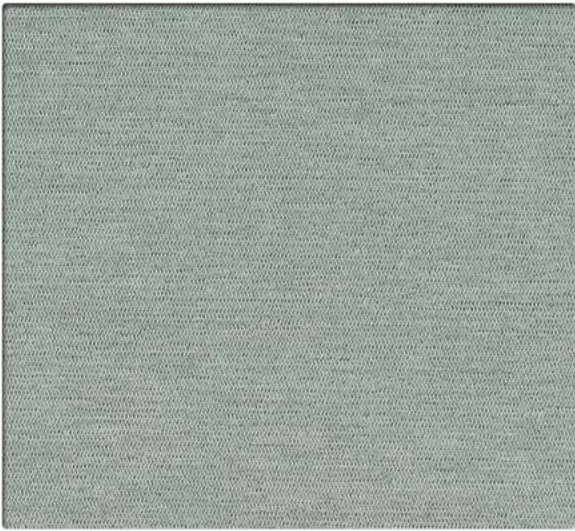

AC-65538 Mist #19



AC-65539 Graphite #20



AC-65521 Garnet #2

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance

Environmental

- LBC Red List Free
- REACH Compliant
- RoHS Compliant
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications



Content	100% Polyester
Finish	Non-PFAS / Water-Based Stain Resistant
Backing	Acrylic
Weight	18.0 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	50 yards
	Made in the USA

Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 150,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 186 lbs. min., Fill: 117 lbs. min.
Seam Slippage ASTM D-4034	Warp: 137 lbs. min., Fill: 131 lbs. min.
Brush Pilling ASTM D-3511	Class 5.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.5
Crocking AATCC-8	Dry: Class 4.0, Wet: Class 5.0

Flammability*

ASTM E-84 (Unadhered)	Class A or 1
California Technical Bulletin 117-2013 Section 1	Passed
NFPA 260 Class A	Passed
UFAC	Class 1

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com