


Stone's Throw


WOVEN FABRIC




AC-65590 Sand #1

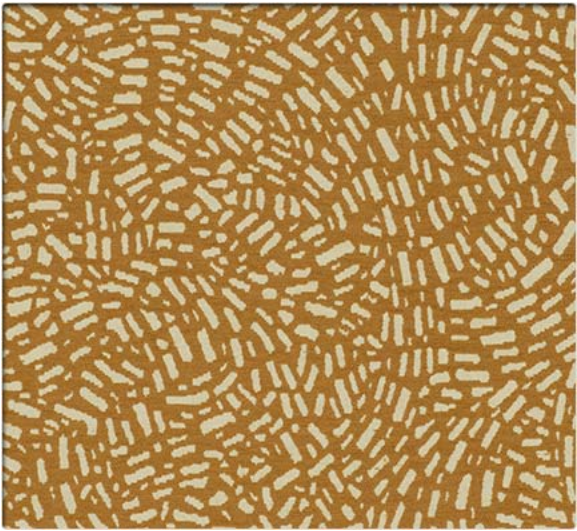


AC-65591 Butterscotch #2

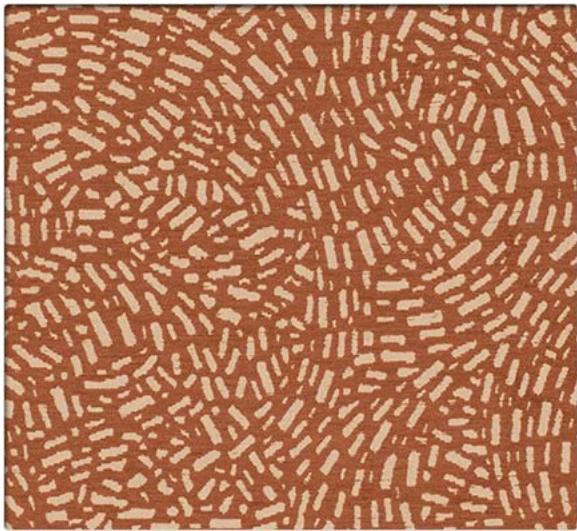

AC-65592 Coral #3

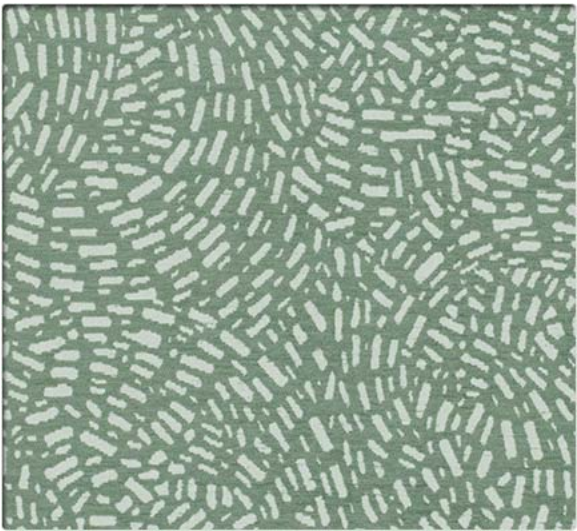

AC-65593 Sea Glass #4

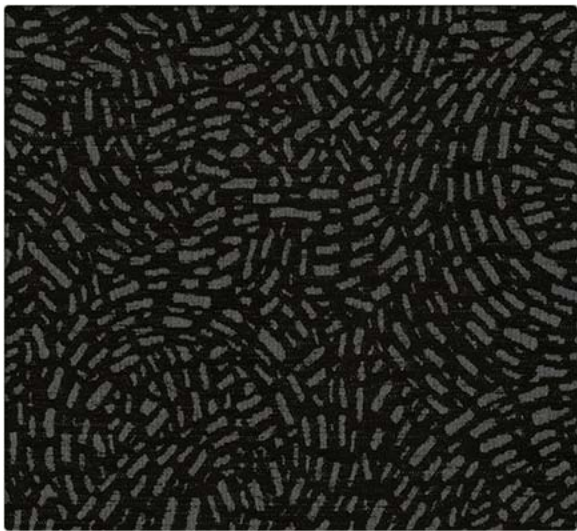


AC-65598 Onyx #9




AC-65595 Indigo #6

Stone's Throw


WOVEN FABRIC

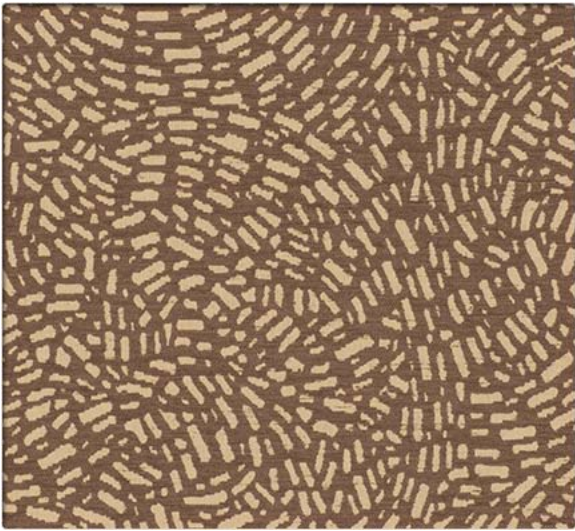

AC-65596 Cocoa #7

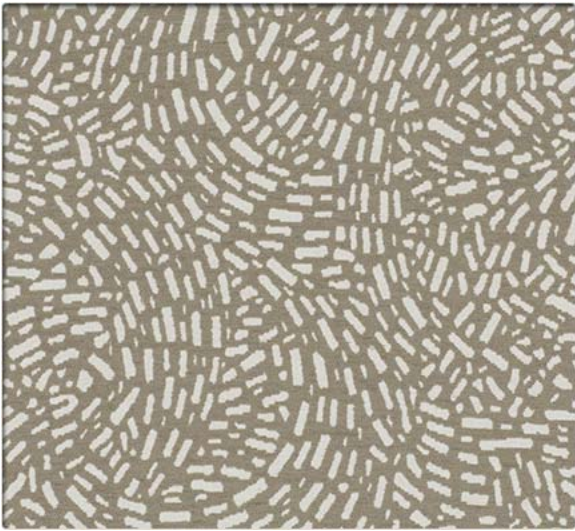

AC-65597 Stone #8

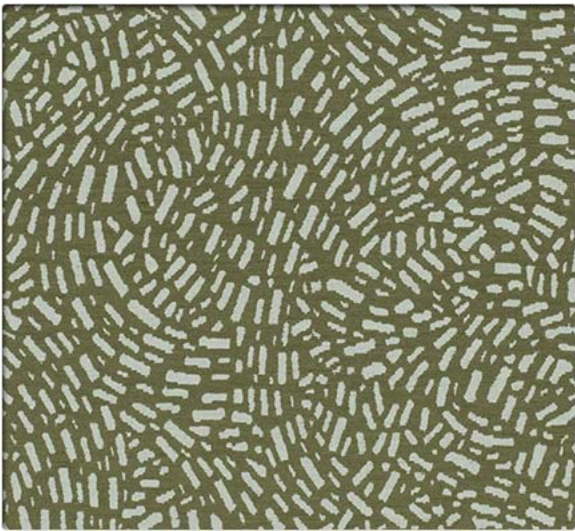

AC-65594 Basil #5

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Bleach-solution cleanable

Environmental

- GREENGUARD Gold Certified
- LBC Red List Free
- REACH Compliant
- RoHS Compliant
- Recycled content
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications

Content	53% Polyester, 32% Post Consumer Recycled Polyester, 15% Nylon
Finish	Non-PFAS / Water-Based Stain Resistant
Backing	Acrylic
Weight	19.0 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Repeat	Horizontal: 14.5 inches, Vertical: 25.5 inches, directional
Roll Size	40 yards
	Made in the USA

Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 105,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 152 lbs. min., Fill: 253 lbs. min.
Seam Slippage ASTM D-4034	Warp: 181 lbs. min., Fill: 123 lbs. min.
Brush Pilling ASTM D-3511	Class 4.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.0
Crocking AATCC-8	Dry: Class 4.5, Wet: Class 5.0

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
NFPA 260	Class 1
UFAC	Class 1

