

Tranquil


WOVEN FABRIC



AC-65620 Sand #1



AC-65640 Onyx #21

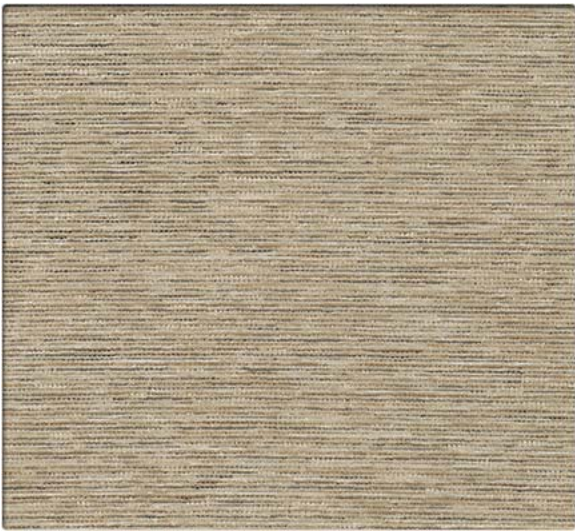


AC-65622 Pebble #3



AC-65623 Butterscotch #4



AC-65624 Caramel #5

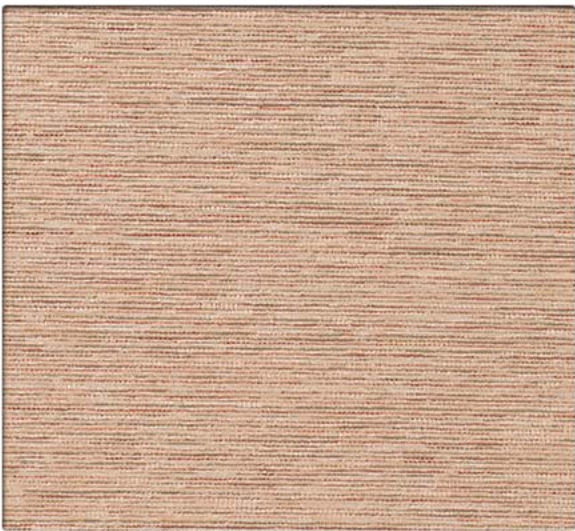

AC-65625 Blush #6

Tranquil


WOVEN FABRIC



AC-65626 Coral #7



AC-65627 Blossom #8

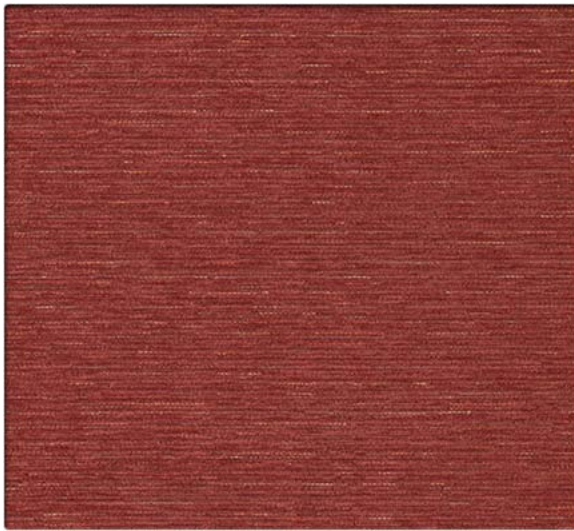

AC-65628 Garnet #9



AC-65629 Bordeaux #10



AC-65630 Basil #11



AC-65631 Eucalyptus #12

Tranquil

WOVEN FABRIC



AC-65632 Sea Glass #13



AC-65633 Ice Blue #14



AC-65634 Periwinkle #15



AC-65635 Midnight #16



AC-65636 Indigo #17



AC-65637 Cocoa #18

Tranquil

WOVEN FABRIC



AC-65638 Chocolate #19



AC-65639 Stone #20



AC-65621 Alabaster #2

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance

Environmental

- GREENGUARD Gold Certified
- LBC Red List Free
- REACH Compliant
- RoHS Compliant
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications

Content	100% Polyester
Finish	Non-PFAS / Water-Based Stain Resistant
Backing	Acrylic
Weight	12.02 oz./lin. yd. ± 1.0 oz.
Picks	40 per inch
Ends	145 per inch
Width	54 inches
Roll Size	50 yards
	Made in the USA

Performance Characteristics

Abrasion Resistance** Wyzenbeek	Exceeds 120,000 double rubs
Break Strength ASTM D-5034	Warp: 210 lbs. min., Fill: 150 lbs. min.
Seam Slippage ASTM D-4034	Warp: 89.5 lbs. min., Fill: 38.4 lbs. min.
Brush Pilling ASTM D-3511	Class 5.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.5
Crocking AATCC-8	Dry: Class 4.0, Wet: Class 4.5

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
NFPA 260	Class 1
UFAC	Class 1



C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com