




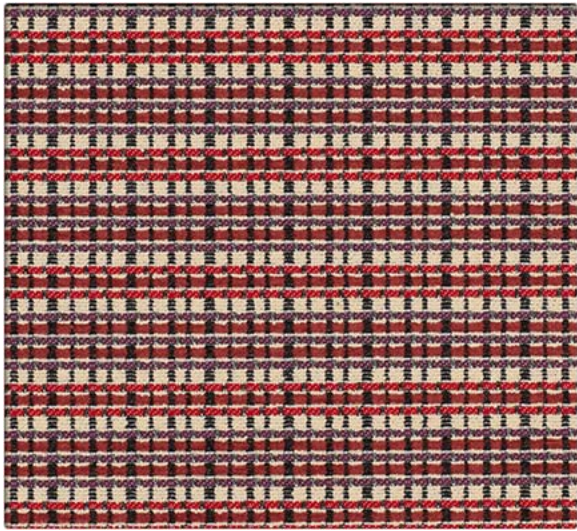


AC-65510 Berry #1

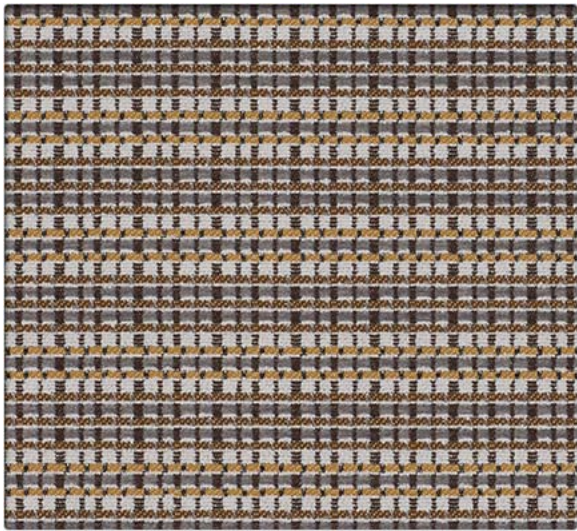


AC-65515 Graphite #6

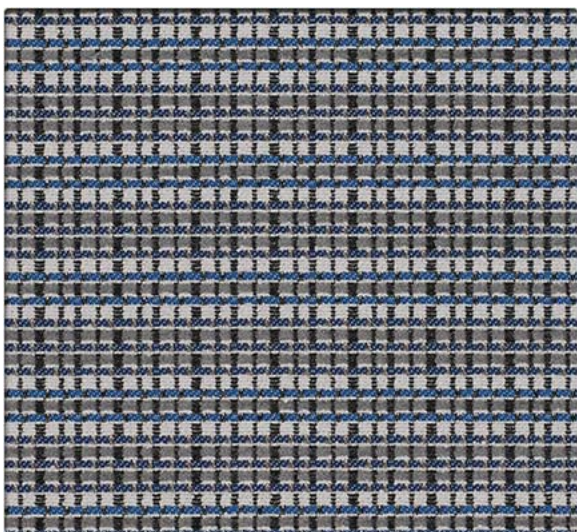

AC-65514 Midnight #5

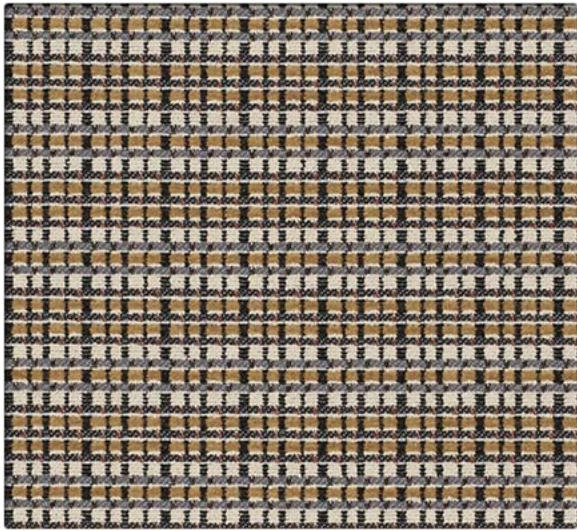

AC-65511 Amber #2

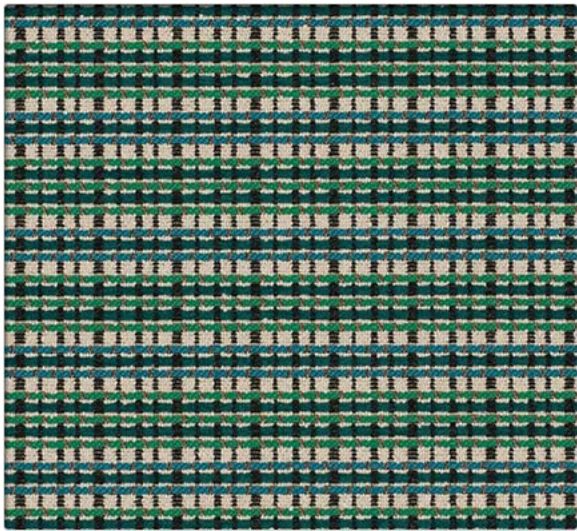

AC-65513 Herb #4



AC-65512 Beach #3

Performance Summary
- Enhanced soil + stain resistance - Enhanced abrasion resistance
Environmental
- LBC Red List Free - OEKO-TEX Standard 100 Certified - No PFAS, fluorocarbons or perfluorinated compounds - No added flame retardants - No added antimicrobials - Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications	   
Content	100% Polyester
Finish	Non-PFAS / Water-Based Stain Resistant
Backing	Acrylic
Weight	23 oz./lin. yd. ± 1.0 oz.
Picks	66.65 per inch
Ends	167.64 per inch
Width	54 inches
Repeat	Horizontal: 1.25 inches, Vertical: 1.75 inches, directional
Roll Size	50 yards
Performance Characteristics	
Abrasion Resistance** ASTM D-4157	Exceeds 150,000 double rubs
Break Strength ASTM D-5034	Warp: 312 lbs. min., Fill: 337 lbs. min.
Seam Slippage ASTM D-4034	Warp: 179 lbs. min., Fill: 146 lbs. min.
Brush Pilling ASTM D-3511	Class 5.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 5.0
Crocking AATCC-8	Dry: Class 4.5, Wet: Class 5.0
Flammability*	
ASTM E-84 (Unadhered)	Class A or 1
California Technical Bulletin 117-2013 Section 1	Passed
NFPA 260	Class 1
UFAC	Class 1