


Use	Wallcovering
Content	100% Vinyl (without Harmful Phthalates)
Finish	Polyurethane
Backing	Cotton, Osnaburg, Polyester
Cleaning	Bleach (10:1), Water-based (W)
Weight	21 ounces/linear yard
Width	54 inches (137 cm)
Hanging Method	
Reverse Hang, Random Match	
Flammability	ASTM E 84 Adhered Class A, IMO FTPC 5
Lightfastness	200 hours
Wallcovering Classification	Type II
ACT	
Standards & Certifications	Healthier Hospitals*, SCS Indoor Advantage Gold
Material Chemistry	Low VOC
Sustainable Logistics	Ships Carbon Neutral
Warranty	10 years
Origin	United States




Eggshell
6545-101

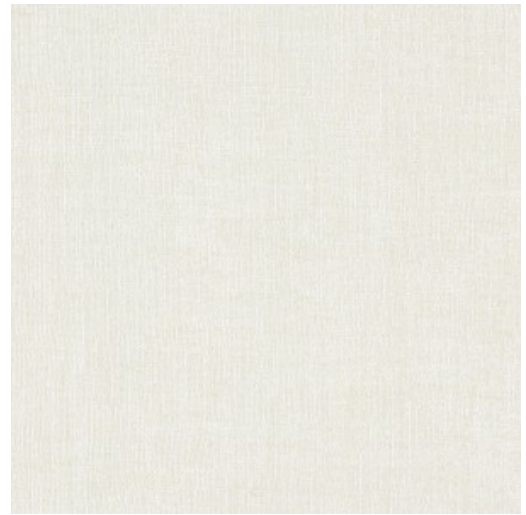

Sand
6545-102




Pumice
6545-103



Mocha
6545-104




Buttermilk
6545-105




Wheat
6545-106



Doe
6545-107



Bone
6545-108




Sandstone
6545-109



Jute
6545-110




hemp
6545-111



Cornsilk
6545-201




Straw
6545-202



Nugget
6545-203



Steppe
6545-204




Cerise
6545-301



Cornflower
6545-401



Ink
6545-402



Lichen
6545-501




Quince
6545-502




Orchid
6545-601



Plum
6545-602



Penny
6545-701



Henna
6545-702



Aluminum
6545-801



Zinc
6545-802



Nickel
6545-803



Mercury
6545-804



Pewter
6545-805



Pyrite
6545-806



Mica
6545-807