

SOLI

VINYL · Type II


RENEW®
eco-conscious
Recycled Wall Surfaces

Photo:
Wallcovering
Soli
ACW-52484 Tequila Sunrise #14


Arc-Com Wall Surfaces products
are designed and colored to
coordinate with the full spectrum
of Arc-Com textile products for
Upholstery, Drapery, Cubicle,
and Panel applications.

Custom colors are available through
Arc-Com WALL SURFACES Studio.
Minimum yardage requirements apply.

SOLI UNTRIMMED
Soli material shipped untrimmed. Red lines indicate suggested random trim line.
For best installation double cutting on the wall is recommended.
Random Match / Reverse Hang - 54" finished width.

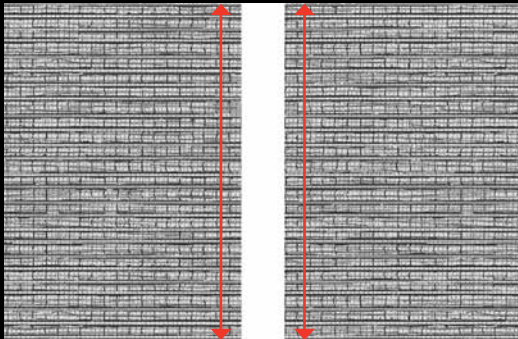

SOLI TRIMMED
Soli shown with recommended random trim line - 54" finished width. For best
installation double cutting on the wall is recommended. The horizontal design elements
will create an obvious and natural join at the seam.

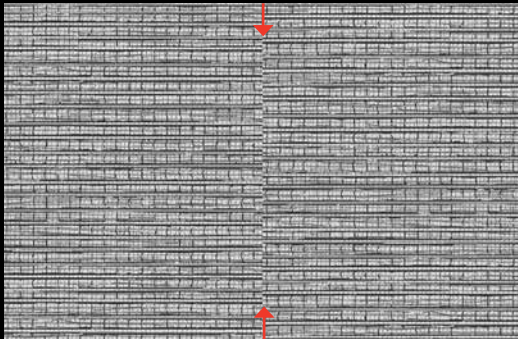

PHYSICAL PROPERTIES:

Width:	55/56"	Finished Width:	54"
Weight:	Type II, 21 oz/Lin. Yd. 651 Grams per Lin. Meter	Backing:	Recycled Non-Woven (10% Post Consumer Recycled Content)
Tear Strength:	25 x 25	Tensile Strength:	50 x 55
Repeat:	Random Match / Reverse Hang		
Fire Rated:	Class A / ASTM E-84 Tunnel Test Tested on TYPE X Fire Rated Gypsum Board NFPA Life Safety Code 101-6-5.3 NFPA Corner Burn Test 286 Class A CAN-S102M International Building Code - 2006 Edition Flame Spread: 20* Smoke Developed: 40* Criteria Values on 5/8" Type X Gypsum Board: Flame Spread: 0-25 / Smoke Developed: 0-450 This test method is also published under the following designations: ANSI 255 NFPA 255 UBC 8-1 (42-1) UL 723		

*The numerical flame spread rating referenced herein is not intended to reflect hazards presented by this or any other material under actual fire conditions. Arc-Com shall submit, upon request, a Certificate of Compliance that wallcoverings used meet specifications and modifications outlined herein.

MEA	
Acceptance:	Approved for use in the City of New York, Department of Buildings.
Federal	
Specifications:	Meets or exceeds requirements for Type II material for Federal Specifications CCC-W-408 A/C/D and W-101 WA Quality Standard for Polymer Coated Fabric Wallcovering. Tested in accordance with test procedures detailed in Federal Specification CCC-T-191A.
Quality Standards:	LOW IN VOC's / Printed with water based inks CALIFORNIA 01350 INDOOR AIR QUALITY - Low VOC emitting vinyl wallcoverings meets California Department of Health Services Section 01350 requirements for office and school interiors. STAIN AND MILDEW RESISTANCE - Best rating (0) as tested in accordance with G.S.A. Federal Specification CCC-W-408 A/C/D. ANTI-MICROBIAL - All of our vinyl wallcoverings contain bactericide and mildew inhibitors to discourage the growth of mold and mildew under normal conditions.
LEED® Points:	10% Post Consumer Recycled Content contributes to LEED® POINTS.

PERFORMANCE FEATURES:

Composition:	Recycled Material - 10% Recycled Content. Free of Cadmium, Mercury and ozone-depleting chemicals. Soli is recyclable and can be returned to be recycled. Quantity of material to be recycled must be equivalent to the quantity of Soli ordered.
Permeability:	Vinyl wallcovering has little or no moisture permeability. If the design, construction or maintenance of a building and / or other circumstances allows moisture to accumulate in a wall or wall cavity, vinyl wallcovering can act as a vapor barrier restricting the escape of moisture and increasing the risk of mold growth. Mold and mildew are naturally occurring and are present everywhere in nature. They need only water and organic material (such as wood, paper or plant material) to feed upon and grow. Vinyl wallcovering permeability can be increased through perforation and alternative product constructions with varying degrees of increased permeability depending on methods used. No wallsurfacing material will prevent mold growth if moisture accumulation is permitted to occur. An experienced professional who is familiar with building conditions and circumstances should be consulted concerning benefits and limitations of vinyl wallcovering. Arc-Com Wallcoverings contain additives to resist mold and other micro-biological growth on the product. Those additives, however, will not prevent mold growth if moisture is allowed to accumulate behind the wall. For more information on wallcovering permeability and mold, Arc-Com recommends that you visit www.wallcoverings.org .
Perforation/ Micro-Venting:	Vinyl wallcovering permeability can be increased through perforation/micro-venting, when installed with permeable wallcovering primer and adhesive. Perforation/Micro-Venting is available on a custom order basis, 30 yard minimum quantity per color, at an additional cost.
Metallics:	The environmental lighting of your installation may create a subtle gradation of color due to the light reflective quality of this design utilizing pearlescent and metallic inks.
Natural Materials:	The subtle variations exhibited in designs that are replications of natural materials are an inherent characteristic and expected beauty of these designs.
Warranty:	5 Year Limited Warranty on Manufacturing Defects.
Installation:	Random Match / Reverse Hang Detailed Arc-Com installation instructions are enclosed with each bolt. To order a sample, to check stock / delivery, or to place an order, please call Arc-Com Headquarters or one of the Showrooms listed. Copyright © 2014 All Rights Reserved. MADE IN USA

Showrooms: Atlanta · Boston · Chicago · Dallas · Houston · Los Angeles · New York City
San Francisco · Washington, DC

International: Australia · British Columbia · Calgary · Hong Kong · Mexico · Montréal · Taiwan · Toronto

Arc-Com Fabrics, Inc.
33 Ramland South, Orangeburg, NY 10962
1-800-223-5466 www.arc-com.com



52471CD

SOLI

VINYL · Type II


RENEW®
eco-conscious
Recycled Wall Surfaces

Photo:
Wallcovering
Soli
ACW-52484 Tequila Sunrise #14


Arc-Com Wall Surfaces products are designed and colored to coordinate with the full spectrum of Arc-Com textile products for Upholstery, Drapery, Cubicle, and Panel applications.

Custom colors are available through Arc-Com WALL SURFACES Studio. Minimum yardage requirements apply.

SOLI UNTRIMMED
Soli material shipped untrimmed. Red lines indicate suggested random trim line. For best installation double cutting on the wall is recommended. Random Match / Reverse Hang - 54" finished width.

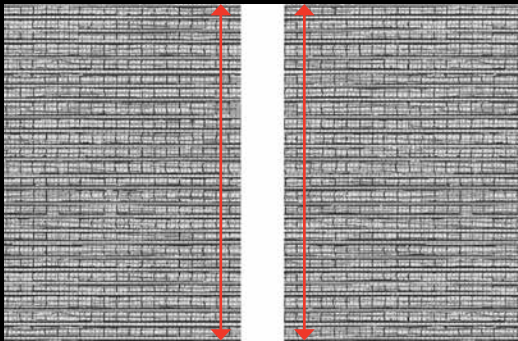

SOLI TRIMMED
Soli shown with recommended random trim line - 54" finished width. For best installation double cutting on the wall is recommended. The horizontal design elements will create an obvious and natural join at the seam.

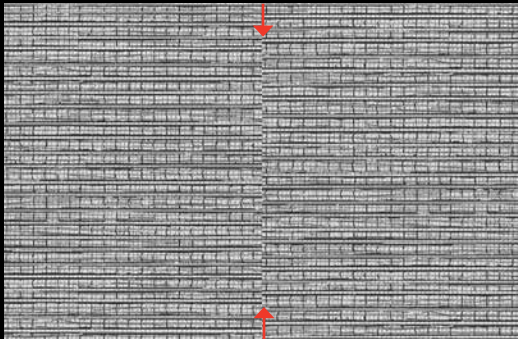

PHYSICAL PROPERTIES:

Width:	55/56"	Finished Width:	54"
Weight:	Type II, 21 oz/Lin. Yd. 651 Grams per Lin. Meter	Backing:	Recycled Non-Woven (10% Post Consumer Recycled Content)
Tear Strength:	25 x 25	Tensile Strength:	50 x 55
Repeat:	Random Match / Reverse Hang		
Fire Rated:	Class A / ASTM E-84 Tunnel Test Tested on TYPE X Fire Rated Gypsum Board NFPA Life Safety Code 101-6-5.3 NFPA Corner Burn Test 286 Class A CAN-S102M International Building Code - 2006 Edition Flame Spread: 20* Smoke Developed: 40* Criteria Values on 5/8" Type X Gypsum Board: Flame Spread: 0-25 / Smoke Developed: 0-450 This test method is also published under the following designations: ANSI 255 NFPA 255 UBC 8-1 (42-1) UL 723		

*The numerical flame spread rating referenced herein is not intended to reflect hazards presented by this or any other material under actual fire conditions. Arc-Com shall submit, upon request, a Certificate of Compliance that wallcoverings used meet specifications and modifications outlined herein.

MEA	
Acceptance:	Approved for use in the City of New York, Department of Buildings.
Federal	
Specifications:	Meets or exceeds requirements for Type II material for Federal Specifications CCC-W-408 A/C/D and W-101 WA Quality Standard for Polymer Coated Fabric Wallcovering. Tested in accordance with test procedures detailed in Federal Specification CCC-T-191A.
Quality Standards:	LOW IN VOC's / Printed with water based inks CALIFORNIA 01350 INDOOR AIR QUALITY - Low VOC emitting vinyl wallcoverings meets California Department of Health Services Section 01350 requirements for office and school interiors. STAIN AND MILDEW RESISTANCE - Best rating (0) as tested in accordance with G.S.A. Federal Specification CCC-W-408 A/C/D. ANTI-MICROBIAL - All of our vinyl wallcoverings contain bactericide and mildew inhibitors to discourage the growth of mold and mildew under normal conditions.
LEED® Points:	10% Post Consumer Recycled Content contributes to LEED® POINTS.

PERFORMANCE FEATURES:

Composition:	Recycled Material - 10% Recycled Content. Free of Cadmium, Mercury and ozone-depleting chemicals. Soli is recyclable and can be returned to be recycled. Quantity of material to be recycled must be equivalent to the quantity of Soli ordered.
Permeability:	Vinyl wallcovering has little or no moisture permeability. If the design, construction or maintenance of a building and / or other circumstances allows moisture to accumulate in a wall or wall cavity, vinyl wallcovering can act as a vapor barrier restricting the escape of moisture and increasing the risk of mold growth. Mold and mildew are naturally occurring and are present everywhere in nature. They need only water and organic material (such as wood, paper or plant material) to feed upon and grow. Vinyl wallcovering permeability can be increased through perforation and alternative product constructions with varying degrees of increased permeability depending on methods used. No wallsurfacing material will prevent mold growth if moisture accumulation is permitted to occur. An experienced professional who is familiar with building conditions and circumstances should be consulted concerning benefits and limitations of vinyl wallcovering. Arc-Com Wallcoverings contain additives to resist mold and other micro-biological growth on the product. Those additives, however, will not prevent mold growth if moisture is allowed to accumulate behind the wall. For more information on wallcovering permeability and mold, Arc-Com recommends that you visit www.wallcoverings.org .
Perforation/ Micro-Venting:	Vinyl wallcovering permeability can be increased through perforation/micro-venting, when installed with permeable wallcovering primer and adhesive. Perforation/Micro-Venting is available on a custom order basis, 30 yard minimum quantity per color, at an additional cost.
Metallics:	The environmental lighting of your installation may create a subtle gradation of color due to the light reflective quality of this design utilizing pearlescent and metallic inks.
Natural Materials:	The subtle variations exhibited in designs that are replications of natural materials are an inherent characteristic and expected beauty of these designs.
Warranty:	5 Year Limited Warranty on Manufacturing Defects.
Installation:	Random Match / Reverse Hang Detailed Arc-Com installation instructions are enclosed with each bolt. To order a sample, to check stock / delivery, or to place an order, please call Arc-Com Headquarters or one of the Showrooms listed. Copyright © 2014 All Rights Reserved. MADE IN USA

Showrooms: Atlanta · Boston · Chicago · Dallas · Houston · Los Angeles · New York City
San Francisco · Washington, DC

International: Australia · British Columbia · Calgary · Hong Kong · Mexico · Montréal · Taiwan · Toronto

Arc-Com Fabrics, Inc.
33 Ramland South, Orangeburg, NY 10962
1-800-223-5466 www.arc-com.com



52471CD

Job: 4159
Date: 11/19/14
v.3 js

Outside Left Panel

Note: Colors on this proof do not represent actual color.

■ = Black
■ = PMS 485 Red
■ = PMS 347 Green
■ = PMS 360 Green
+ Soft Matte Mylar

OK'd by:


Date:

This proof must be OK'd by our customer's authorized agent. Production cannot be started until it is returned. Final responsibility for copy, spelling, grammar, placement, punctuation, etc. will rest on you, the customer. Changes at this point may result in extra charges. Please mark any changes clearly on this proof.


All proofs remain the property of: Leed Selling Tools Corp.




Job: 4159 Date: 11/04/14 v.1 JS	
Outside Right Panel	
Note: Colors on this proof do not represent actual color.	
 = Black	 = PMS 485 Red
 = PMS 347 Green	 = PMS 360 Green
+ Soft Matte Mylar	+ 4cp (CMYK)
OK'd by:	
Date:	
This proof must be OK'd by our customer's authorized agent. Production cannot be started until it is returned. Final responsibility for copy, spelling, grammar, placement, punctuation, etc. will rest on you, the customer. Changes at this point may result in extra charges. Please mark any changes clearly on this proof.	
All proofs remain the property of: Leed Selling Tools Corp.	

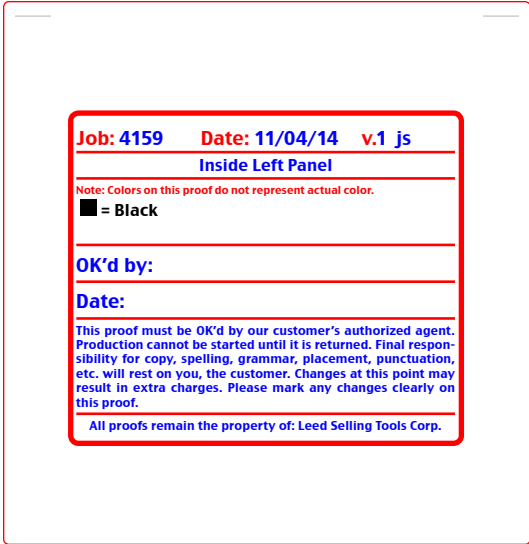


ACW-52471
Coconut #1




ACW-52472
Taupestone #2




ACW-52473
Dove #3

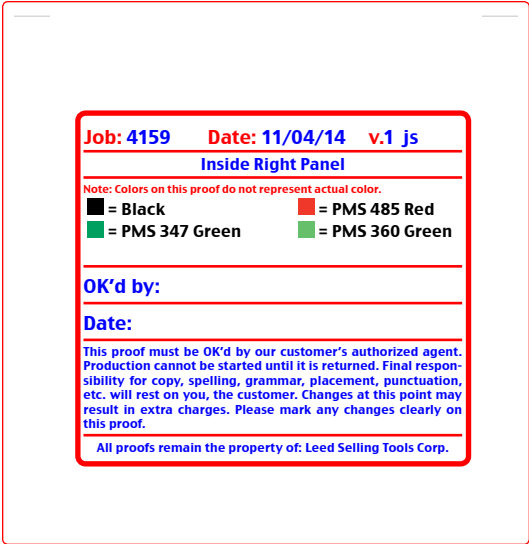


ACW-52480
Opal #10




ACW-52481
Overcast #11




ACW-52482
Slate #12




ACW-52474
Honeycomb #4




ACW-52475
Allspice #5




ACW-52476
Terra #6




ACW-52483
Red Rust #13




ACW-52484
Tequila Sunrise #14




ACW-52485
Cactus #15




ACW-52477
Boardwalk #7




ACW-52478
Rocky Road #8




ACW-52479
Cappuccino #9




ACW-52486
Truffle #16




ACW-52487
Frosted Mineral #17




ACW-52488
Lake #18

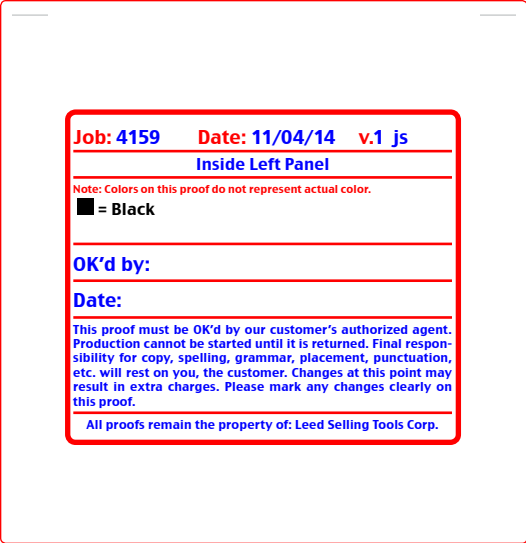


ACW-52471
Coconut #1




ACW-52472
Taupestone #2



ACW-52473
Dove #3




ACW-52474
Honeycomb #4




ACW-52475
Allspice #5



ACW-52476
Terra #6



ACW-52477
Boardwalk #7



ACW-52478
Rocky Road #8



ACW-52479
Cappuccino #9



Job: 4159 Date: 11/04/14 v.1 js

Inside Right Panel

Note: Colors on this proof do not represent actual color.

■ = Black

■ = PMS 485 Red

■ = PMS 347 Green

■ = PMS 360 Green

OK'd by:

Date:

This proof must be OK'd by our customer's authorized agent. Production cannot be started until it is returned. Final responsibility for copy, spelling, grammar, placement, punctuation, etc. will rest on you, the customer. Changes at this point may result in extra charges. Please mark any changes clearly on this proof.

All proofs remain the property of: Leed Selling Tools Corp.

ACW-52480
Opal #10

ACW-52481
Overcast #11

ACW-52482
Slate #12

ACW-52483
Red Rust #13

ACW-52484
Tequila Sunrise #14

ACW-52485
Cactus #15

ACW-52486
Truffle #16

ACW-52487
Frosted Mineral #17

ACW-52488
Lake #18