

# STRIATIONS

## VINYL · Type II


**RENEW®**  
eco-conscious  
Recycled Wall Surfaces

Photo:  
Wallcovering  
Striations  
ACW-52680 Black Knight #20


Arc-Com Wall Surfaces products are designed and colored to coordinate with the full spectrum of Arc-Com textile products for Upholstery, Drapery, Cubicle, and Panel applications.

Custom colors are available through Arc-Com WALL SURFACES Studio. Minimum yardage requirements apply.

**STRIATIONS UNTRIMMED**  
Striations material shipped untrimmed. Red lines indicate suggested random trim line. For best installation double cutting on the wall is recommended. Random Match / Reverse Hang - 54" finished width.

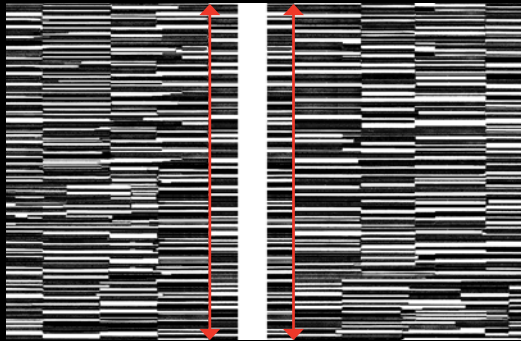

**STRIATIONS TRIMMED**  
Striations shown with recommended random trim line - 54" finished width. For best installation double cutting on the wall is recommended. The horizontal design elements will create an obvious natural join at the seam.

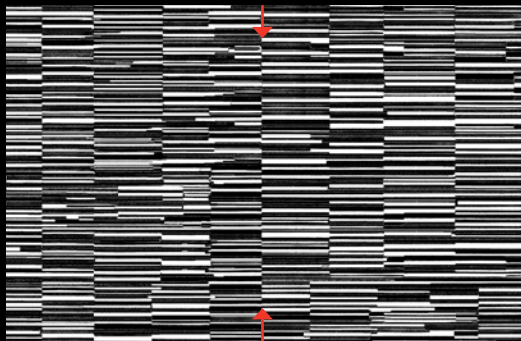

### PHYSICAL PROPERTIES:

|                       |                                                                                                                         |                          |                                                                            |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------------------------------------------|
| <b>Width:</b>         | 55/56"                                                                                                                  | <b>Finished Width:</b>   | 54"                                                                        |
| <b>Weight:</b>        | Type II, 20 oz/Lin. Yd.<br>626 Grams per Lin. Meter                                                                     | <b>Backing:</b>          | Recycled Woven Polycotton Osnaburg<br>(10% Post Consumer Recycled Content) |
| <b>Tear Strength:</b> | 25 x 25                                                                                                                 | <b>Tensile Strength:</b> | 50 x 55                                                                    |
| <b>Repeat:</b>        | Random Match / Reverse Hang                                                                                             |                          |                                                                            |
| <b>Fire Rated:</b>    | Class A / ASTM E-84 Tunnel Test<br>NFPA Life Safety Code 101-2006 Edition<br>International Building Code - 2006 Edition |                          |                                                                            |
|                       | Flame Spread: 20*    Smoke Developed: 70*                                                                               |                          |                                                                            |
|                       | Criteria Values on 5/8" Type X Gypsum Board:<br>Flame Spread: 0-25 / Smoke Developed: 0-450                             |                          |                                                                            |
|                       | This test method is also published under the following designations:<br>ANSI 255    NFPA 255    UBC 8-1    UL 723       |                          |                                                                            |

\*The numerical flame spread rating referenced herein is not intended to reflect hazards presented by this or any other material under actual fire conditions. Arc-Com shall submit, upon request, a Certificate of Compliance that wallcoverings used meet specifications and modifications outlined herein.

### MEA

**Acceptance:** Approved for use in the City of New York, Department of Buildings.

### Federal

**Specifications:** Meets or exceeds requirements for Type II material for Federal Specifications CCC-W-408 A/C/D and W-101 WA Quality Standard for Polymer Coated Fabric Wallcovering. Tested in accordance with test procedures detailed in Federal Specification CCC-T-191A.

**Quality Standards:** LOW IN VOC's / Printed with water based inks  
CALIFORNIA 01350 INDOOR AIR QUALITY - Low VOC emitting vinyl wallcoverings meets California Department of Health Services Section 01350 requirements for office and school interiors.  
STAIN AND MILDEW RESISTANCE - Best rating (0) as tested in accordance with G.S.A. Federal Specification CCC-W-408 A/C/D.  
ANTI-MICROBIAL - All of our vinyl wallcoverings contain bactericide and mildew inhibitors to discourage the growth of mold and mildew under normal conditions.

**LEED® Points:** 10% Post Consumer Recycled Content contributes to LEED® POINTS.

### PERFORMANCE FEATURES:

**Composition:** Recycled Material - 10% Recycled Content.  
Free of Cadmium, Mercury and ozone-depleting chemicals.

**Permeability:** Vinyl wallcovering has little or no moisture permeability. If the design, construction or maintenance of a building and / or other circumstances allow moisture to accumulate in a wall or wall cavity, vinyl wallcovering can act as a vapor barrier restricting the escape of moisture and increasing the risk of mold growth. Mold and mildew are naturally occurring and are present everywhere in nature. They need only water and organic material (such as wood, paper or plant material) to feed upon and grow. Vinyl wallcovering permeability can be increased through perforation and alternative product constructions with varying degrees of increased permeability depending on methods used. No wallsurfacing material will prevent mold growth if moisture accumulation is permitted to occur. An experienced professional who is familiar with building conditions and circumstances should be consulted concerning benefits and limitations of vinyl wallcovering. Arc-Com Wallcoverings contain additives to resist mold and other micro-biological growth on the product. Those additives, however, will not prevent mold growth if moisture is allowed to accumulate behind the wall.

For more information on wallcovering permeability and mold, Arc-Com recommends that you visit [www.wallcoverings.org](http://www.wallcoverings.org).

**Perforation/ Micro-Venting:** Vinyl wallcovering permeability can be increased through perforation/micro-venting, when installed with permeable wallcovering primer and adhesive. Perforation/Micro-Venting is available on a custom order basis, 30 yard minimum quantity per color, at an additional cost.

**Metallics:** The environmental lighting of your installation may create a subtle gradation of color due to the light reflective quality of this design utilizing pearlescent and metallic inks.

**Natural Materials:** The subtle variations exhibited in designs that are replications of natural materials are a natural inherent characteristic and expected beauty of these designs.

**Warranty:** 5 Year Limited Warranty on Manufacturing Defects.

**Installation:** Random Match / Reverse Hang.  
Detailed Arc-Com installation instructions are enclosed with each bolt.

To order a sample, to check stock / delivery, or to place an order, please call Arc-Com Headquarters or one of the Showrooms listed.

Copyright © 2015 Arc-Com Fabrics, Inc. All Rights Reserved.

MADE IN USA

**Showrooms:** Atlanta · Boston · Chicago · Dallas · Houston · Los Angeles · New York City  
San Francisco · Washington, DC

**International:** Australia · British Columbia · Calgary · Hong Kong · Mexico · Montréal · Taiwan · Toronto

**Arc-Com Fabrics, Inc.**

33 Ramland South, Orangeburg, NY 10962  
1-800-223-5466    [www.arc-com.com](http://www.arc-com.com)



52661CD