

DAENERYS

VINYL · Type II

RENEW®
eco-conscious
Recycled Wall Surfaces


Photo:
Wallcovering
Daenerys
Full Wall ACW-52849 Molten Copper #9
Half Wall (Railroaded) ACW-52847 Tuscan #7

Upholstery
Monte Carlo
AC-69651 Plum #12


Arc-Com Wall Surfaces products
are designed and colored to
coordinate with the full spectrum
of Arc-Com textile products for
Upholstery, Drapery, Cubicle,
and Panel applications.

Custom colors are available through
Arc-Com WALL SURFACES Studio.
Minimum yardage requirements apply.


DAENERYS UNTRIMMED
Daenerys material shipped untrimmed. Red lines indicate suggested trim line. For best installation double cutting on the wall is recommended. Straight Across Match / Reverse Hang - 52" finished width.

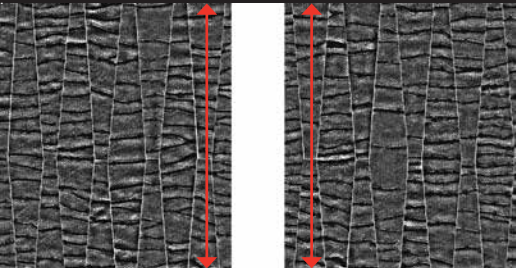

DAENERYS TRIMMED
Daenerys shown with recommended trim line - 52" finished width. For best installation double cutting on the wall is recommended. The vertical and horizontal design elements may create an obvious natural join at the seam. Overlap and align vertical diamond stripe design element. Trim through center of vertical diamond passage creating similar spacing between diamond shape vertical stripe elements.

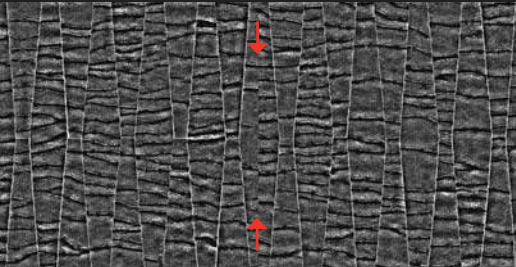

DAENERYS RAILROADED
Daenerys shown installed Railroaded (Horizontal). Although Daenerys is not designed to be matched horizontally, shown in the room set as well as in this scan. Daenerys can be installed Railroaded with a random match trim. The vertical and horizontal design elements will create an obvious natural join at the seam. The mis-matched seam is the expected visual aesthetics with this installation method.

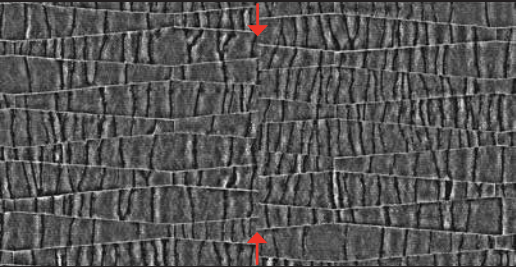

PHYSICAL PROPERTIES:

Width:	55/56"	Finished Width:	54"
Weight:	Type II, 20 oz/Lin. Yd. 626 Grams per Lin. Meter	Backing:	Recycled Woven Polycotton Osnaburg (10% Post Consumer Recycled Content)
Tear Strength:	25 x 25	Tensile Strength:	50 x 55
Repeat:	Straight Across Match / Reverse Hang		
Fire Rated:	Class A / ASTM E-84 Tunnel Test NFPA Life Safety Code 101-2006 Edition International Building Code - 2006 Edition		

Flame Spread: 20* Smoke Developed: 70*

Criteria Values on 5/8" Type X Gypsum Board:
Flame Spread: 0-25 / Smoke Developed: 0-450

This test method is also published under the following designations:
ANSI 255 NFPA 255 UBC 8-1 UL 723

*The numerical flame spread rating referenced herein is not intended to reflect hazards presented by this or any other material under actual fire conditions. Arc-Com shall submit, upon request, a Certificate of Compliance that wallcoverings used meet specifications and modifications outlined herein.

MEA

Acceptance: Approved for use in the City of New York, Department of Buildings.

Federal Specifications:

Meets or exceeds requirements for Type II material for Federal Specifications CCC-W-408 A/C/D and W-101 WA Quality Standard for Polymer Coated Fabric Wallcovering. Tested in accordance with test procedures detailed in Federal Specification CCC-T-191A.

Quality Standards:

LOW IN VOC's / Printed with water based inks
CALIFORNIA 01350 INDOOR AIR QUALITY - Low VOC emitting vinyl wallcoverings meets California Department of Health Services Section 01350 requirements for office and school interiors.
STAIN AND MILDEW RESISTANCE - Best rating (0) as tested in accordance with G.S.A. Federal Specification CCC-W-408 A/C/D.
ANTI-MICROBIAL - All of our vinyl wallcoverings contain bactericide and mildew inhibitors to discourage the growth of mold and mildew under normal conditions.

LEED® Points: 10% Post Consumer Recycled Content contributes to LEED® POINTS.

PERFORMANCE FEATURES:

Composition: Recycled Material - 10% Recycled Content.
Free of Cadmium, Mercury and ozone-depleting chemicals.

Permeability: Vinyl wallcovering has little or no moisture permeability. If the design, construction or maintenance of a building and / or other circumstances allows moisture to accumulate in a wall or wall cavity, vinyl wallcovering can act as a vapor barrier restricting the escape of moisture and increasing the risk of mold growth. Mold and mildew are naturally occurring and are present everywhere in nature. They need only water and organic material (such as wood, paper or plant material) to feed upon and grow. Vinyl wallcovering permeability can be increased through perforation and alternative product constructions with varying degrees of increased permeability depending on methods used. No wallsurfacing material will prevent mold growth if moisture accumulation is permitted to occur. An experienced professional who is familiar with building conditions and circumstances should be consulted concerning benefits and limitations of vinyl wallcovering. Arc-Com Wallcoverings contain additives to resist mold and other micro-biological growth on the product. Those additives, however, will not prevent mold growth if moisture is allowed to accumulate behind the wall.

For more information on wallcovering permeability and mold, Arc-Com recommends that you visit www.wallcoverings.org.

Perforation/ Micro-Venting:

Vinyl wallcovering permeability can be increased through perforation/micro-venting, when installed with permeable wallcovering primer and adhesive. Perforation/Micro-Venting is available on a custom order basis, 30 yard minimum quantity per color, at an additional cost.

Metallics: The environmental lighting of your installation may create a subtle gradation of color due to the light reflective quality of this design utilizing pearlescent and metallic inks.

Natural Materials: The subtle variations exhibited in designs that are replications of natural materials are a natural inherent characteristic and expected beauty of these designs.

Warranty: 5 Year Limited Warranty on Manufacturing Defects.

Installation: Straight Across Match / Reverse Hang
Daenerys shown with recommended random trim line - 52" finished width.
For best installation double cutting on the wall is recommended.
Detailed Arc-Com installation instructions are enclosed with each bolt.

To order a sample, to check stock / delivery, or to place an order, please call
Arc-Com Headquarters or one of the Showrooms listed.

Copyright © 2015 Arc-Com All Rights Reserved.

MADE IN USA

Showrooms: Atlanta · Boston · Chicago · Dallas · Houston · Los Angeles · New York City
San Francisco · Washington, DC

International: Australia · British Columbia · Calgary · Hong Kong · Mexico · Montréal · Taiwan · Toronto

Arc-Com
33 Ramland South, Orangeburg, NY 10962
1-800-223-5466 www.arc-com.com

