

MOHAVE VINYL · Type II

RENEW[®]
eco-conscious
Recycled Wall Surfaces


Photo:
Wallcovering
Mohave ACW-52127 Moody Blue #17
Place Mat
Tetra ACW-51725 Marcasite #15

Upholstery
Seat Cushions
Vista AC-69835 Smoke #16
Napkins
Metro AC-60720 Midnight #1


Arc-Com Wall Surfaces products
are designed and colored to
coordinate with the full spectrum
of Arc-Com textile products for
Upholstery, Drapery, Cubicle,
and Panel applications.

Custom colors are available through
Arc-Com WALL SURFACES Studio.
Minimum yardage requirements apply.


Mohave material shipped untrimmed. Red lines indicate suggested random trim line. For best installation, double cutting on the wall is recommended. Random match / non-reverse hang- 54" finished width. Note red arrows indicate design directionality outlined in installation note with the shadow in upper section of concave wave.

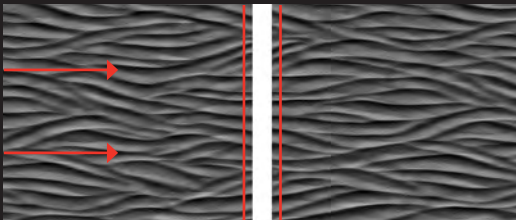

Mohave shown with recommended random match trim line. For best installation, double cutting on the wall is recommended. The horizontal design elements will create an obvious and natural join at the seam. Note correct installation with shadow in the upper section of concave wave, indicated by red arrows.

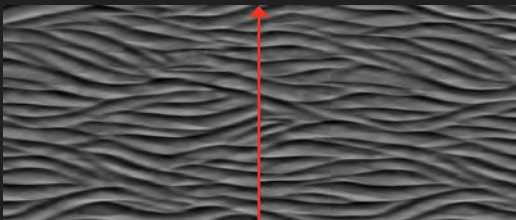

Representation of INCORRECT installation of Mohave. Note shadow is in lower section of concave wave design element distorting dimensional aspect of design indicated with red arrows. Material is incorrectly installed upside down.

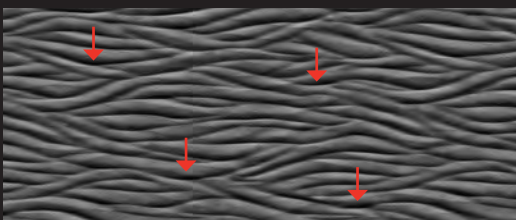

ArcCom
WALL SURFACES

eco-tex[®]

PHYSICAL PROPERTIES:

Width: 55/56" **Finished Width:** 54"
Weight: Type II, 20 oz/Lin. Yd. **Backing:** Recycled Non-Woven
626 Grams per Lin. Meter (10% Post Consumer Recycled Content)
Tear Strength: 25 x 25 **Tensile Strength:** 50 x 55
Repeat: Random Match / Non-Reverse Hang
Fire Rated: Class A / ASTM E-84-08 Tunnel Test
NFPA Life Safety Code 101 - 2006 Edition
International Building Code - 2006 Edition

Flame Spread - 20* Smoke Developed - 70*

Criteria Values on 5/8" Type X Gypsum Board:
Flame Spread: 0-25 / Smoke Developed: 0-450

This test method is also published under the following designations:
ANSI 255 NFPA 255 UBC 8-1 UL 723

*The numerical flame spread rating referenced herein is not intended to reflect hazards presented by this or any other material under actual fire conditions. Arc-Com shall submit, upon request, a Certificate of Compliance that wallcoverings used meet specifications and modifications outlined herein.

MEA
Acceptance: Approved for use in the City of New York, Department of Buildings.
Federal
Specifications: Meets or exceeds requirements for Type II material for Federal Specifications CCC-W-408 A/C/D and W-101 WA Quality Standard for Polymer Coated Fabric Wallcovering. Tested in accordance with test procedures detailed in Federal Specification CCC-T-191A.
LEED® Points: 10% Post Consumer Recycled content contributes to LEED® Points.

PERFORMANCE FEATURES:

Composition: Recycled Material - 10% Post Consumer Recycled Content.
Free of Cadmium, Mercury and ozone-depleting chemicals.

Permeability: Vinyl wallcovering has little or no moisture permeability. If the design, construction or maintenance of a building and / or other circumstances allow moisture to accumulate in a wall or wall cavity, vinyl wallcovering can act as a vapor barrier restricting the escape of moisture and increasing the risk of mold growth. Mold and mildew are naturally occurring and are present everywhere in nature. They need only water and organic material (such as wood, paper or plant material) to feed upon and grow. Vinyl wallcovering permeability can be increased through perforation and alternative product constructions with varying degrees of increased permeability depending on methods used. No wallsurfacing material will prevent mold growth if moisture accumulation is permitted to occur. An experienced professional who is familiar with building conditions and circumstances should be consulted concerning benefits and limitations of vinyl wallcovering. Arc-Com Wallcoverings contain additives to resist mold and other micro-biological growth on the product. Those additives, however, will not prevent mold growth if moisture is allowed to accumulate behind the wall.

For more information on wallcovering permeability and mold, Arc-Com recommends that you visit www.wallcoverings.org.

Perforation/
Micro-Venting: Vinyl wallcovering permeability can be increased through perforation/micro-venting, when installed with permeable wallcovering primer and adhesive. Perforation/Micro-venting is available on a custom order basis, 30 yard minimum quantity per color, at an additional cost.

Natural Materials: The subtle variations exhibited in designs that are replications of natural materials are a natural inherent characteristic and expected beauty of these designs.

Metallics: The environmental lighting of your installation may create a subtle gradation of color due to the light reflective quality of this design utilizing pearlescent and metallic inks.

Warranty: 5 Year Limited Warranty on Manufacturing Defects.

Installation: Mohave is intended as a random match. The horizontal design elements will create an obvious join at the seam and is intended as a natural aspect of horizontal designs and is an inherent beauty of Mohave. Detailed Arc-Com installation instructions are enclosed with each bolt.

Installation Note: Mohave is a dimensional design with special printed optics to create depth perspective and illusion.

To achieve the intended depth and dimension, Mohave MUST be installed with the shadow in the upper section of the horizontal concave wave as illustrated with the red arrows.

To order a sample, to check stock / delivery, or to place an order, please call Arc-Com Headquarters or one of the Showrooms listed.

Copyright © 2012 Arc-Com Fabrics, Inc. All Rights Reserved.

MADE IN USA

Showrooms: Atlanta · Boston · Chicago · Dallas · Houston · Los Angeles · New York City · San Francisco
Washington, DC

International: Australia · British Columbia · Calgary · Hong Kong · Mexico · Montréal · Taiwan · Toronto

Arc-Com Fabrics, Inc.
33 Ramland South, Orangeburg, NY 10962
1-800-223-5466 www.arc-com.com



52111CD