

BLUEPRINT II
175-000, Taupe

TECHNICAL INFORMATION

CATEGORY: Panel
CONTENT: 100% Post-Consumer Recycled Polyester
BACKING: Acrylic
FINISH: None
WIDTH: 66"
WEIGHT: 9.8 oz./ln yd
VISUAL REPEAT: 8.5 in/21.59 cm H, 0.063 in/0.16 cm V
SHOWN RAILOADED: No
DIRECTIONAL: Yes
APPROX. ROLL SIZE: 60 yards
APPLICATION: Indoor


PERFORMANCE



BREAKING STRENGTH: Warp 229.0 / Fill 88.0
COLORFASTNESS TO CROCKING: Dry: Class 4 min./Wet: Class 3 min.
COLORFASTNESS TO LIGHT: 4 min at 40 hours
SEAM SLIPPAGE: Warp 11.0 / Fill 52.0

FLAMMABILITY

PASSES CAL TB 117-2013
NFPA 260/UFAC CLASS 1
AB 2998 COMPLIANT
ASTM E84 CLASS 1 OR A (UNADHERED)

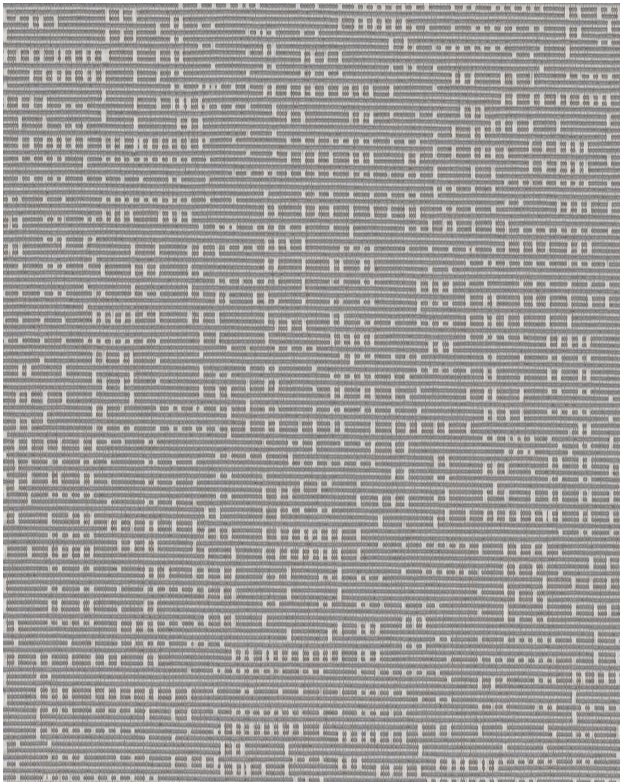

REDUCED ENVIRONMENTAL IMPACT

GREENGUARD GOLD CERTIFIED
PFAS FREE
NO FR ADDITIVES
NO ANTIMICROBIAL ADDITIVES
NO ANTIBACTERIAL ADDITIVES
BPA FREE
LEAD/HEAVY METAL FREE
FORMALDEHYDE FREE
TRIS FREE
PROP 65 COMPLIANT
REACH COMPLIANT
HPD AVAILABLE
ROHS COMPLIANT
MILLED IN AMERICA
RED LIST FREE
DOES NOT CONTAIN CONFLICT MINERALS

WARRANTY

PANEL | '5' FIVE YEAR WARRANTY

See [Warranty Terms](#) for more information.

DYE TRANSFER DISCLAIMER

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. Mayer Fabrics will not assume responsibility for dye transfer caused by external contaminants. Please check compatibility when using this product in combination with painted or varnished surfaces.

ADDITIONAL INFORMATION

Custom Colors: All patterns can be custom colored. Minimum yardage applies.

Digital Swatch Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.

CLEANING & MAINTENANCE


WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

BC: Bleach Cleanable - 1 parts bleach, 10 parts water = 9% bleach, 91% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 9% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.




® This 100% polyester fabric is included in the Underwriter's Laboratory Fabric Recognition Program. Additional testing of this U.L. recognized component is not required on approved panels from participating manufacturers.


BLUEPRINT II COLORS (6)

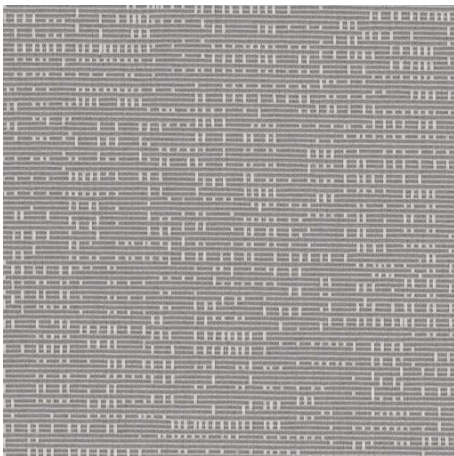


Taupe
175-000

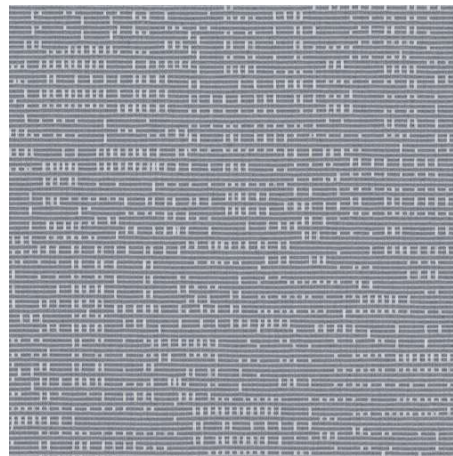


Dusk
175-004

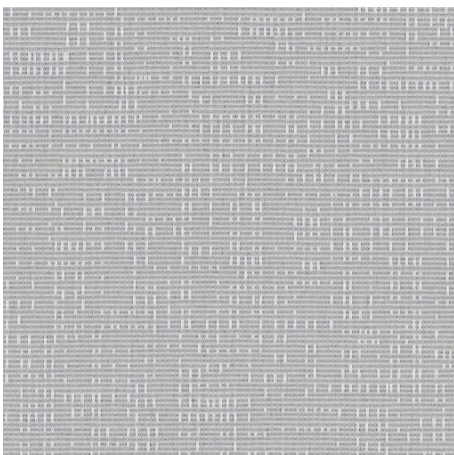


Icy
175-014

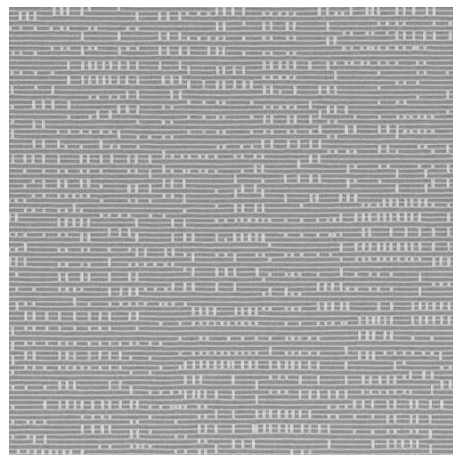

Pewter
175-006

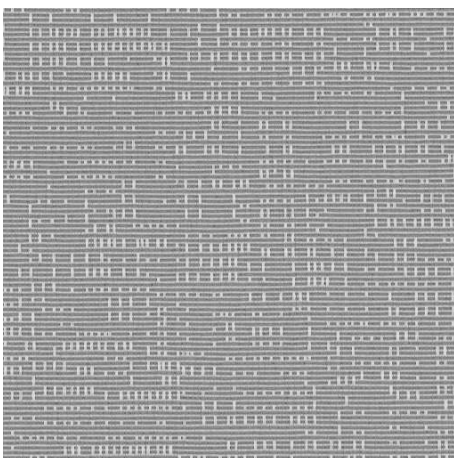

Nickel
175-016

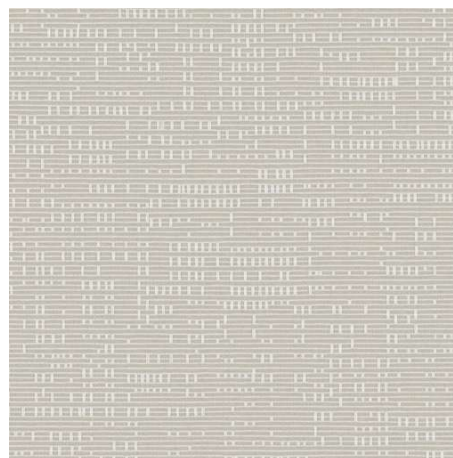

Ivory
175-007