

DASH

177-003, Fog

TECHNICAL INFORMATION

CATEGORY: Panel
CONTENT: 61% Post-Consumer Recycled Polyester/39% Polyester
BACKING: Acrylic
FINISH: None
WIDTH: 66"
WEIGHT: 14.4 oz./ln yd
VISUAL REPEAT: 0.063 in/0.16 cm H, 0.063 in/0.16 cm V
SHOWN RAILROADED: No
DIRECTIONAL: Yes
APPROX. ROLL SIZE: 60 yards
APPLICATION: Indoor


PERFORMANCE



BREAKING STRENGTH: Warp 460.0 / Fill 460.0
COLORFASTNESS TO CROCKING: Dry: Class 4 min./Wet: Class 3 min.
COLORFASTNESS TO LIGHT: 4 min at 40 hours
SEAM SLIPPAGE: Warp 43.0 / Fill 43.0

FLAMMABILITY

PASSES CAL TB 117-2013
NFPA 260/UFAC CLASS 1
AB 2998 COMPLIANT
ASTM E84 CLASS 1 OR A (UNADHERED)

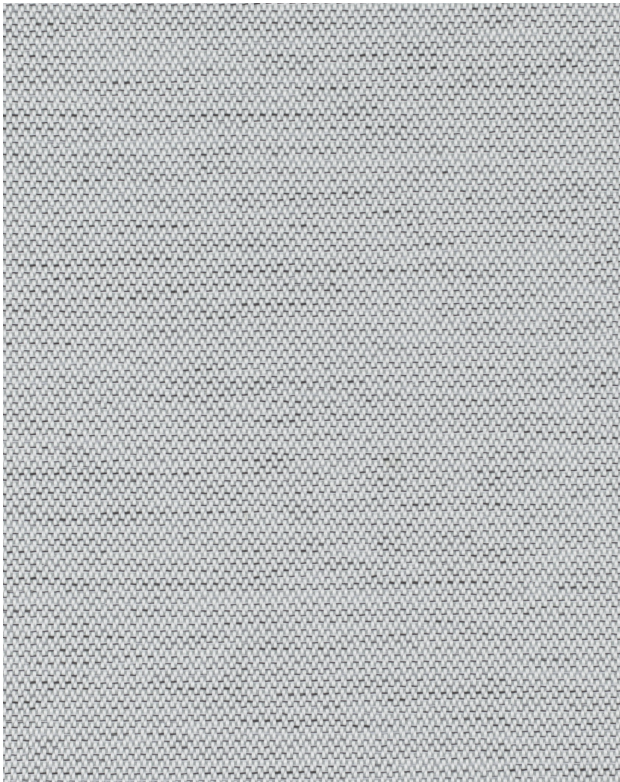

REDUCED ENVIRONMENTAL IMPACT

GREENGUARD GOLD CERTIFIED
PFAS FREE
NO FR ADDITIVES
NO ANTIMICROBIAL ADDITIVES
NO ANTIBACTERIAL ADDITIVES
BPA FREE
LEAD/HEAVY METAL FREE
FORMALDEHYDE FREE
TRIS FREE
PROP 65 COMPLIANT
REACH COMPLIANT
HPD AVAILABLE
ROHS COMPLIANT
MILLED IN AMERICA
RED LIST FREE
DOES NOT CONTAIN CONFLICT MINERALS

WARRANTY

PANEL | '5' FIVE YEAR WARRANTY

See [Warranty Terms](#) for more information.

DYE TRANSFER DISCLAIMER

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. Mayer Fabrics will not assume responsibility for dye transfer caused by external contaminants. Please check compatibility when using this product in combination with painted or varnished surfaces.

ADDITIONAL INFORMATION

Custom Colors: All patterns can be custom colored. Minimum yardage applies.

Digital Swatch Color Matching: Due to color variations on different monitors and color printers, actual swatch colors may vary slightly. Please request a memo sample from Mayer Fabrics to ensure proper color representation.

CLEANING & MAINTENANCE


WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

BC: Bleach Cleanable - 1 parts bleach, 10 parts water = 9% bleach, 91% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 9% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.




® This 100% polyester fabric is included in the Underwriter's Laboratory Fabric Recognition Program. Additional testing of this U.L. recognized component is not required on approved panels from participating manufacturers.


DASH COLORS (7)

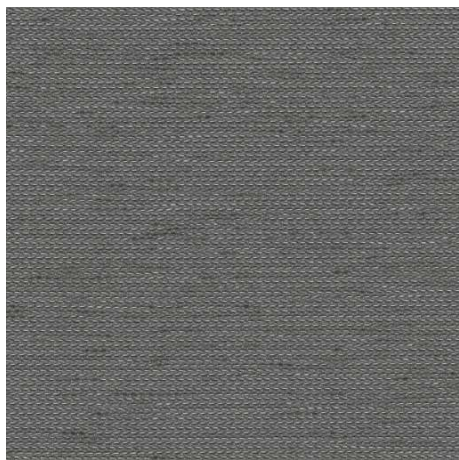


Graphite
177-000

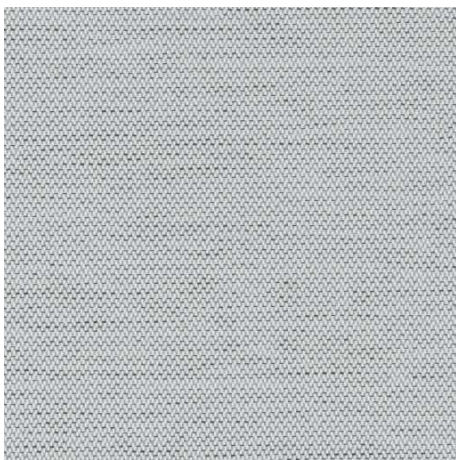


Fog
177-003

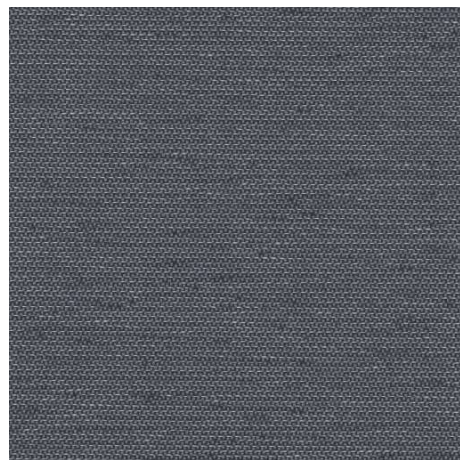


Thunder
177-004

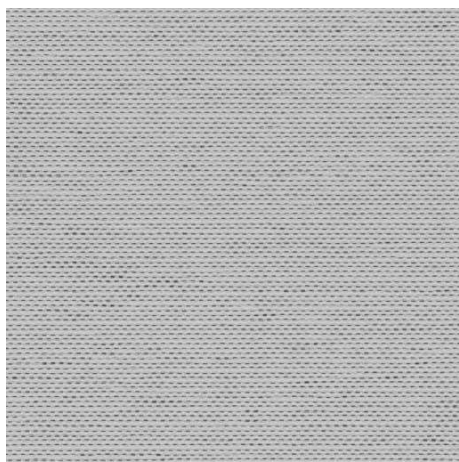


Stone
177-006

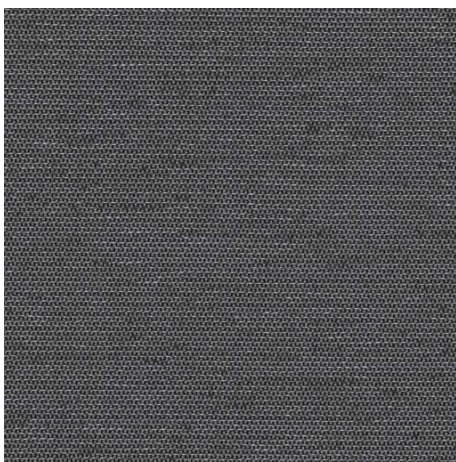

Bitumen
177-016

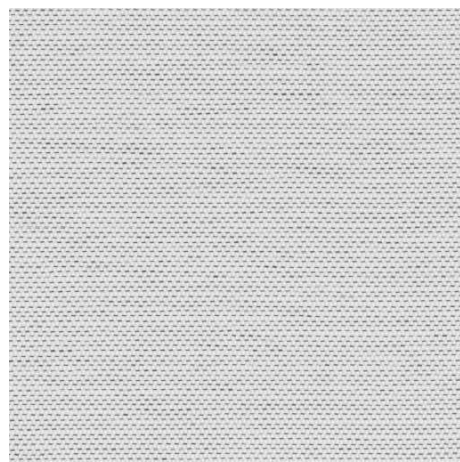

Snow
177-026

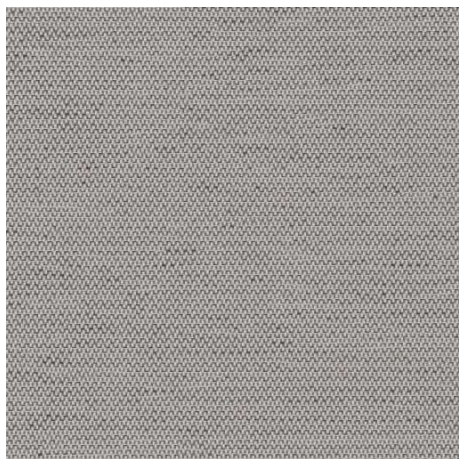

Dune
177-007