




CATEGORY

Upholstery

PROPERTIES

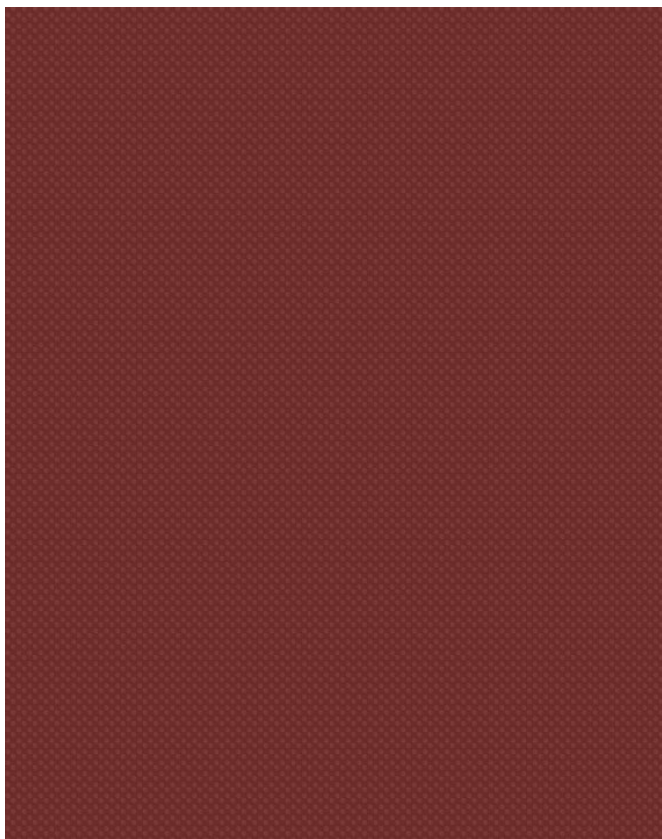

CONTENT

58% Sio™ Silicone face, 42% Polyester backing

BACKING

Polyester

FINISH

None

WIDTH

54"

WEIGHT

28 oz./ln yd

SHOWN RAILROADED

No

DIRECTIONAL

Yes

ROLL LENGTH

30 yards

BREAKING STRENGTH

Warp 112/Fill 119

SEAM SLIPPAGE

Warp: 85.9/Fill: 70.1

ABRASION RESISTANCE

Passes 215,000 Double Rubs (Wyzenbeek) Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

COLORFASTNESS TO CROCKING

Dry: Class 5/Wet: Class 5

COLORFASTNESS TO LIGHT

500 hours

APPLICATION

Atrium, Indoor, Outdoor

FLAMMABILITY

Passes Cal TB 117-2013; NFPA 260/UFAC Class 1; AB 2998 Compliant; ASTM E84 Class 1 or A (Unadhered); ASTM E84 Class 2 or B (Adhered); BS 5852: 2006 Crib 5; FMVSS 302; IMO FTP 2010 Code MSC.307(88), Part 8, 3.1 & 3.2

CLEANING

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

CFC: Coated Fabrics Cleaning - When a spill/stain occurs wipe immediately with a clean dry cloth. Carefully remove the majority of the stain then follow the steps below.

Soap & Water - Remove ordinary dirt and smudges with a mild soap and water solution using a soft cloth or towel. Rinse with fresh water and wipe dry.

Non-abrasive Cleaners - If residue remains, use a straight application of the following cleaners: Fantastik or 409 and gently clean with a soft cloth. Rinse with fresh water and wipe dry.

Isopropyl Alcohol - More stubborn stains may be eliminated using a cotton cloth soaked in 70-91% isopropyl (rubbing) alcohol. Wipe without spreading stain to surrounding area. A second application should be applied with vigorous rubbing in a circular motion. For highly textured material, a soft brush is recommended to clean valleys and crevices. Rinse with fresh water and wipe dry.

BC: Bleach Cleanable - 1 parts bleach, 4 parts water = 20% bleach, 80% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 20% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

Empire Silicone is anti-microbial & anti-bacterial without added chemicals.

Additional cleaning details at www.mayerfabrics.com

WARRANTY

Standard Upholstery | '5' Five Year Warranty

GREENGUARD
Certified