


Brisa — Ultrafabrics

As the world's first breathable polyurethane fabric, the distinguished **Brisa** collection features a subtly textured aesthetic in a wide range of colors. This unrivaled style has a broad performance appeal that is suitable for a myriad of applications.

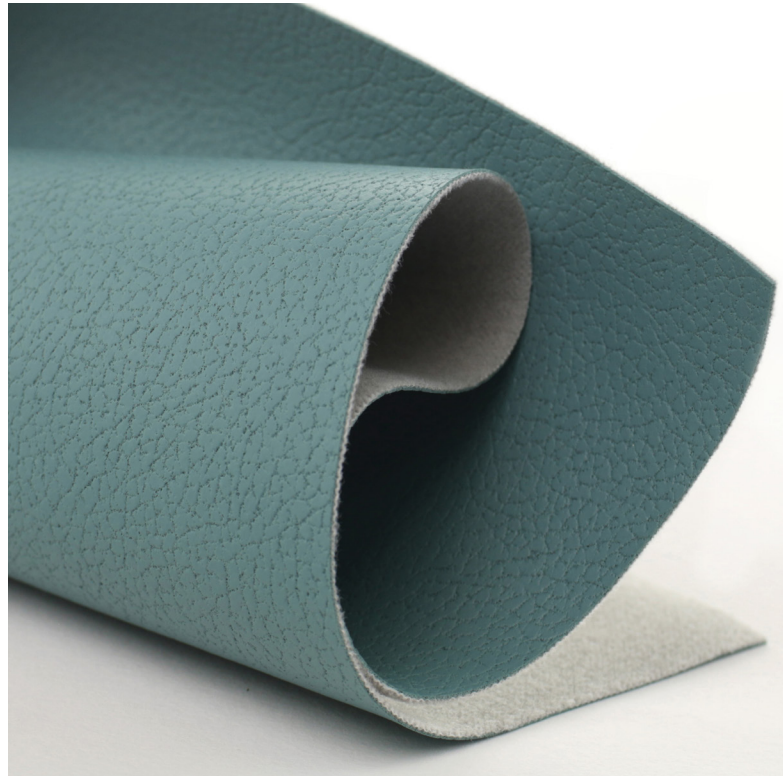


-
- Superior durability – industry-leading 14+ weeks hydrolysis results
 - Blended backcloth for expanded upholstery capabilities
 - 300,000 double rubs (Wyzenbeek), 160,000 rubs (Martindale)
 - Breathable technology promotes airflow for ultimate seating comfort
 - Bleach cleanable (1:5 bleach/water solution)
 - Notable acoustic properties, when paired with 1" fiberglass infill, for sound absorption*

An intelligent solution – the Ultrafabrics family of performance fabrics highlights boundary-pushing innovation where looks, feel and performance matter.

* Only in North America



Acoustics *

Breathable
Comfort

Brisa from Ultrafabrics

Applications

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface

65% Polyester, 35% Rayon Backing

Weight:

Approx. 8.9 oz. Per Square Yard

Approx. 300 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

Colorfastness

Light:

AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source O, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

* Only in North America



Ultrafabrics® and logo, and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.

1/22

ultrafabricsinc.com

