




AC-65610 Sand #1



AC-65611 Butterscotch #2

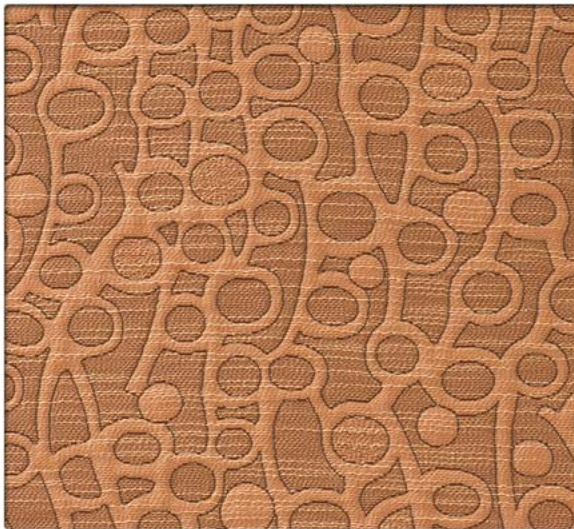


AC-65612 Coral #3




AC-65616 Stone #7



AC-65614 Indigo #5

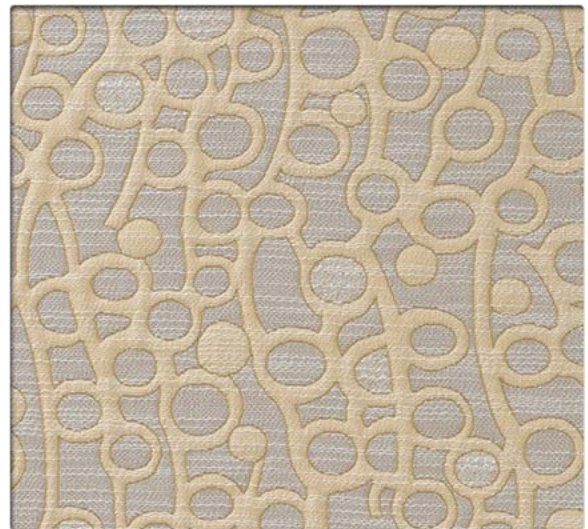

AC-65615 Cocoa #6

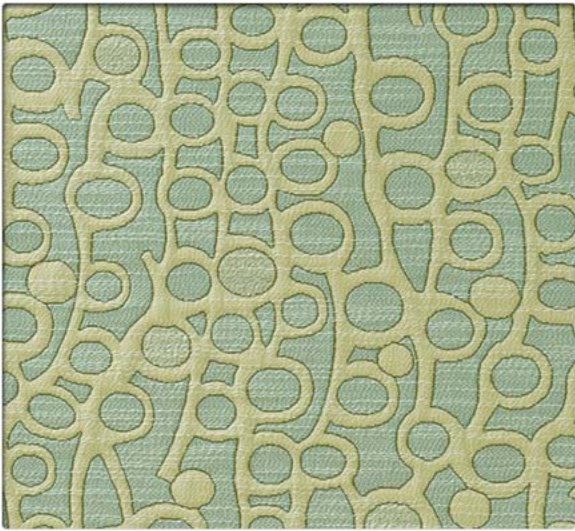

AC-65613 Sea Glass #4

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Bleach-solution cleanable

Environmental

- GREENGUARD Gold Certified
- LBC Red List Free
- OEKO-TEX Standard 100 Certified
- Recycled content
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 20% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications

Content	67% Post Consumer Recycled Polyester, 19% Nylon, 14% Polyester
Finish	Non-PFAS / Water-Based Stain Resistant
Backing	Acrylic
Weight	26.0 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Repeat	Horizontal: 13.75 inches, Vertical: 12.75 inches, directional
Roll Size	50 yards
	Made in the USA

Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 100,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 280.4 lbs. min., Fill: 515.3 lbs. min.
Seam Slippage ASTM D-4034	Warp: 37.6 lbs. min., Fill: 51.7 lbs. min.
Brush Pilling ASTM D-3511	Class 3.5 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.5
Crocking AATCC-8	Dry: Class 5.0, Wet: Class 5.0

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
NFPA 260	Class 1
UFAC	Class 1



C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com